





Our commitment does not end when you buy a Hollis product. Long after the initial sale, we provide prompt and professional after-sales service to keep your gear working well and looking good, for a very long time.

OUR PRODUCT WARRANTIES

| Regulators | Materials and Construction | Limited lifetime* and Hollis for Life* (Free Parts) *Proof that regulator was serviced, according to service interval, to qualify. |
|-----------------------|---|---|
| Buoyancy Compensators | Materials and Construction Requires Annual Service | Five year from date of purchase |
| LX Wings | Materials and Construction | Lifetime |
| Analog Instruments | Materials and Construction Requires Annual Service | Two years from date of purchase |
| Masks, Snorkels, Fins | Materials and Construction | One-year from date of purchase |
| Wetsuits | Materials and Construction | One-year from date of purchase |
| Drysuits | Materials and Construction | 5-year warranty on construction. Does not cover damage caused by normal wear and tear, misuse or negligence. The warranty is limited to repair or replacement, at Huish Outdoors' option, and where permitted by law does not include consequential or incidental damages. This warranty is rendered invalid by unauthorized repairs. 1 year warranty on zippers and valves |
| Neoprene Accessories | Materials and Construction | One-year from date of purchase |
| Lights | Materials and Construction | One-year from date of purchase |

(-)occis.

| PACKAGE PROMOS 4 | MASKS AND FINS |
|-------------------------------|---------------------------|
| INSTRUMENTS | MASKS COMPARISON CHART |
| BRASS SPG | FIN COMPARISON CHART . M1 |
| LOW-PROFILE BRASS SPG | M3 |
| LARGE PONY BOTTLE GAUGE | M4 |
| INSTRUMENT ACCESSORIES | F1 "BAT FIN" |
| | F1 LT |
| REGULATORS 10 | F2 |
| SECOND STAGE COMPARISON CHART | MASK AND FIN ACCESSORIES |
| FIRST STAGE COMPARISON CHART | DACC |
| 200LX | BAGS |
| 150LX | DUFFEL BAG |
| 100LX | MESH DUFFEL BAG |
| 500SE | DRY BAG |
| DCX | REGULATOR BAG |
| DC7 | LIGHTS |
| H02 | LIGHTS COMPARISON CHART |
| REGULATOR ACCESSORIES | LED 6 |
| | LED 3 |
| BUOYANCY | LED MINI 3 |
| BUOYANCY COMPARISON CHART | MICRO LIGHT |
| ENVIRO-PRO | LIGHT ACCESSORIES |
| HD-200 | FINGER SPOOLS |
| L.T.S | FINGER SPUULS |
| R.E.D.S | LIFT BAGS AND SMB |
| HTS 2 | LIFT BAGS |
| SOLO | SIGNAL MARKER BUOYS |
| SMS 100 DUAL | |
| SMS 75 | GENERAL ACCESSOR |
| SMS KATANA | |
| LX SERIES WINGS | MERCHANDISING |
| BUOYANCY ACCESSORIES | EXPOSURE SIZING C |
| EXPOSURE | EXI GOOKE SIZING C |
| EXPOSURE COMPARISON CHART | |
| DX-300X | |
| BTR-500 | |
| NEOTEK 8/7/6 | |
| AUG 450 | |
| AUG 260 | |
| AUG 260 SOCKS | |
| AUG BASE | |
| CANVAS OVERBOOT | |
| EVENUE ACCESSIBLES 34 | |


| MASKS AND FINS | 3 |
|--------------------------|------|
| MASKS COMPARISON CHART | . 30 |
| FIN COMPARISON CHART | . 30 |
| M1 | . 3' |
| M3 | |
| M4 | |
| F1 "BAT FIN" | . 38 |
| F1 LT | |
| F2 | |
| MASK AND FIN ACCESSORIES | . 39 |
| BAGS | 40 |
| DUFFEL BAG | . 4 |
| MESH DUFFEL BAG | . 4 |
| DRY BAG | . 4 |
| REGULATOR BAG | . 4 |
| LIGHTS | 42 |
| LIGHTS COMPARISON CHART | |
| LED 6 | |
| LED 3 | |
| LED MINI 3 | . 4 |
| MICRO LIGHT | . 4 |
| LIGHT ACCESSORIES | . 4 |
| FINGER SPOOLS | 46 |
| LIFT BAGS AND SMB | 47 |
| LIFT BAGS | |
| SIGNAL MARKER BUOYS | |
| SIGNAL MARKER BOOTS | . ¬ |
| GENERAL ACCESSORIES | 49 |
| MERCHANDISING | 50 |
| EXPOSURE SIZING CHARTS | .51 |
| | |

2018 PACKAGE PROMOS

SMS PACKAGE

Pick any of the SMS Systems or upgrade your customer to either the 500SE or 200LX + DCX Kit and pay the price difference.

| Part No- | Item | Qty |
|--------------|---------------------------|-----|
| 240-3573 | DCX 1st Stage DIN | 2 |
| 240-2000-LX | 200LX 2nd Stage | 2 |
| 204-2382-036 | Hose, LP 36" | 1 |
| 204-2382-084 | Hose, LP 84" | 1 |
| 204-2310 | Press Gauge Metal No Boot | 2 |
| 204-2380-006 | Hose, HP 6" | 2 |
| 208-13XX-00X | SMS75 or SMS KATANA | 1 |
| 240-4152 | Regulator Necklace | 1 |



^{*}Upgrade to SMS100 Dual for an additional fee.



SMS REGULATOR PACKAGE*

Customize your SMS package. Pick any of the SMS Systems or swap a 200LX for the 500SE.

| Part No- | ltem | Qty |
|--------------|---------------------------|-----|
| 240-3573 | DCX 1st Stage DIN | 2 |
| 240-2000-LX | 200LX 2nd Stage* | 2 |
| 204-2382-036 | Hose, LP 36" | 1 |
| 204-2382-084 | Hose, LP 84" | 1 |
| 204-2310 | Press Gauge Metal No Boot | 2 |
| 204-2380-006 | Hose, HP 6" | 2 |
| 240-4152 | Regulator Necklace | 1 |



^{*}or 500SE 2nd Stage at same price











^{*}No product substitutions. No additional discounts. Two package order/ shipment minimum. Description and image must be included with any advertisement. Available in the USA and Caribbean only. May not be combined with any other offer.

2018 PACKAGE PROMOS

MASK AND FIN PACKAGE PROGRAM

Purchase twelve sets and receive the package pricing:

| Part No. | ltem |
|----------------|-----------------|
| MASK | S (PURCHASE 12) |
| 205-4500-07 | M1 |
| 205-4700-07/10 | M3 |
| 205-4800-07 | M4 |
| FINS | (PURCHASE 12) |
| 214-2200-00X | F1 Yellow tip |
| 214-2100-00X | F1 Light |
| 214-2200-00X | F1 |
| 214-2300-00X | F2 |



HTS 2 PACKAGE*

| Part No. | Item | Qty |
|--------------|---------------------|-----|
| 208-1202-00X | HTS 2 Harness | 1 |
| 208-1253-0XX | S25LX or S38LX Wing | 1 |
| 208-0015 | LX Weight System | 1 |



ELITE II PROGRAM*

| Part No. | Item | Qty |
|--------------|---------------------------|-----|
| 208-1295-000 | SS Back Plate | 1 |
| 208-1222-00X | Elite II Harness | 1 |
| 208-1253-0XX | S25LX or S38LX Wing | 1 |
| 208-1070-010 | Cam Band SS | 2 |
| 208-1264 | Back Pad with Book Screws | 1 |



2018 PACKAGE PROMOS

HD-200 PACKAGE*

| Part No. | Item | Qty |
|---------------|-------------------------|-----|
| 208-1151-00X | HD-200 BCD | 1 |
| 240-201X-07-M | 200LX + DCX YOKE or DIN | 1 |
| 240-3150-M | 150LX OCTO | 1 |
| 204-2310 | Pressure Gauge Metal | 1 |
| 204-2380-024 | Hose, HP 24" | 1 |

TEK TRAVEL PACKAGE*

| Part No. | Item | Qty |
|---------------|-------------------------|-----|
| 208-1110-00X | LTS BCD | 1 |
| 240-150X-07-M | 150LX + DC7 YOKE or DIN | 1 |
| 240-3150-M | 150LX OCTO | 1 |
| 204-2310 | Pressure Gauge Metal | 1 |
| 204-2380-024 | Hose, HP 24" | 1 |

DOUBLE PACKAGE*

| Part No- | Item | Qty |
|------------------------|---------------------------|-----|
| 240-3573 | DCX 1st Stage DIN | 2 |
| 240-2000-LX | 200LX 2nd Stage | 2 |
| 204-2382-022 | Hose, LP 22" | 1 |
| 204-2382-084 | Hose, LP 84" | 1 |
| 204-2310 | Press Gauge Metal No Boot | 1 |
| 204-2380-024 | Hose, HP 24" | 1 |
| 208-1260 | Solo Harness | 1 |
| 208-1295-000 | SS Back Plate | 1 |
| 208-1264 | Back Pad with Book Screws | 1 |
| 208-1253-045 or 060 | C45LX or C60LX Wing | 1 |

^{*}or 500SE 2nd Stage at same price













^{*}No product substitutions. No additional discounts. Two package order/shipment minimum. Description and image must be included with any advertisement. Available in the USA and Caribbean only. May not be combined with any other offer.

INSTRUMENTS







PONY BOTTLE GAUGE



LOW-PROFILE BRASS SPG

BRASS SPG

The Hollis Brass Pressure Gauge is a solid and compact brass SPG. This rugged, easy-to-read gauge works great as a primary or even backup pressure gauge for the beginner to the most advanced technical diver. Gauge has a luminescent face for easy reading in low light or night diving conditions. Pressure gauge module has a durable tempered glass scratch resistant lens.

Luminescent Faceplate

Standard with Air Spool and Viton O-rings

Oxygen Clean

Available in 0-5000 PSI or 0-360 BAR

Chrome-plated brass housing with Bourdon tube

Scratch-resistant tempered glass

2" (50.8 mm) size



LOW-PROFILE BRASS SPG

The new Low-Profile Brass SPG with scratch-resistant lens, high-contrast background, luminescent needle, low weight and small size allow for a more streamlined rigging and are ideal for stage and deco bottles.

High-contrast black background and white markings

Luminescent needle

Standard with Air Spool and Viton O-rings

Oxygen clean

Available in 0-5000 PSI or 0-400 BAR

Super hard PVD coated brass housing with Bourdon tube

Scratch-resistant plastic lens

1.5" (38.1 mm)



| PART NO. | ITEM |
|-------------|--|
| 204-2310 | PRESSURE GAUGE MODULE PSI METAL W/O BOOT |
| 204-2311 | PRESSURE GAUGE MODULE BAR METAL W/O BOOT |
| 204-2308-07 | PRESSURE GAUGE MODULE PSI LOW-PROFILE BLK METAL W/O BOOT |
| 204-2309-07 | PRESSURE GAUGE MODULE BAR LOW-PROFILE BLK METAL W/O BOOT |

LARGE PONY BOTTLE GAUGE

The Hollis Pony Bottle Gauge is a tiny gauge that easily connects to the 7/16" high-pressure port of your pony bottle regulator or other alternate tank regulator to show pressure in an easy-to-read display. Any diver who has used a pony bottle knows the hassle involved with trying to find out how much air is in the tank. Switching regulators to view the primary pressure gauge or adding a separate pressure gauge to the pony bottle is a problem. Now with the Hollis Pony Bottle Gauge, all those headaches are over.

| Eliminates Use of Standard Hosed Pressure Gauge |
|--|
| Compact Small Design |
| Large Numbers and Colored Indicators Easy to Read Display |
| Equipped with HP O-Ring Ready to Install |
| Nitrox compatible to 100% O2 |
| Threads Directly 7/16" First Stage HP Port |
| Available in 0-5000 PSI or 0-400 BAR |
| Ideal for Pony Bottles, Deco Bottles or Back-Up Air Supplies |
| One-Way Safety Valve |
| 2-Year Limited Warranty |
| |



| PART NO. | ITEM |
|----------|----------------------------|
| 204-2317 | LG PONY BOTTLE GAUGE - PSI |
| 204-2318 | LG PONY BOTTLE GAUGE - BAR |

INSTRUMENT ACCESSORIES

| ITEM |
|------------------------------------|
| BATTERY KIT, DG01, DG02, DG03, TX1 |
| BATTERY KIT, TRANSMITTER, CR2 |
| DIVELOG, USB DIRECT CONNECT |
| AIR SPOOL METAL GAUGES |
| BOOT ONLY (BK), METAL PG |
| H/P HOSE - 6"/15CM |
| H/P HOSE - 9"/23CM |
| H/P HOSE 24"/61CM |
| H/P HOSE 28"/71CM |
| |

REGULATORS

SECOND STAGE REGULATORS



FIRST STAGE REGULATORS



COMPARISON CHARTS

| SECOND STAGES | 200LX | 150LX | 100LX | 150LX OCTO | 100LX OCTO | 500SE |
|--|------------------|---|---------------------|------------------------|------------------------|------------------------|
| Valve Type | Demand | Demand | Demand | Demand | Demand | Servo |
| Pneumatically Balanced System | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Material | PVD-plated brass | Chrome-plated brass | Chrome-plated brass | Chrome-plated brass | Chrome-plated brass | Chrome-plated brass |
| Patented Dynamic Adjustment Automatically Maintains Inhalation Effort throughout the Dive | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Dive / Pre-Dive Switch | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Integrated Purge Button | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Patented Orthodontic Mouthpiece with High-Density Bite Tabs | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Nitrox Compatible | Standard to 40% | Standard to 40% Up to 99.9% on DC7 DECO and HO2 | Standard to 40% | Standard to 40% | Standard to 40% | Standard to 40% |
| Weight without hose | 9.6 oz (273 g) | 8.96 oz (254 g) | 8.75 oz (248 g) | 8.96 oz (254 g) | 8.75 oz (248 g) | 8.6 oz (240 g) |
| First Stage Configuration | DCX | DC7, HO2 | DC3 | N/A | N/A | DC7 |
| Minimum Cracking Effort | .8 CIW | 1.0 CIW | 1.0 CIW | 1.5 CIW | 1.5 CIW | .08 CIW |
| Factory Set Inhalation Effort | 1.0 - 1.2 CIW | 1.0 - 1.2 CIW | 1.0 - 1.2 CIW | 1.5 - 2.0 CIW | 1.5 - 2.0 CIW | 1.0 - 1.2 CIW |
| Work of Breathing - 198 ft (60 m) | .76 Joules | .90 Joules | .90 Joules | .90 Joules | .90 Joules | 1.1 Joules |
| Warranty | LIMITED LIFETIME | LIMITED LIFETIME | LIMITED LIFETIME | LIMITED LIFETIME | LIMITED LIFETIME | LIMITED LIFETIME |
| Lifetime Free Replacement Parts Program | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

| FIRST STAGES | DCX | DC3 | DC7 | H02 |
|---|--------------------------------|--------------------------------|---|-------------------------------|
| Туре | Over-Balanced Diaphragm | Over-Balanced Diaphragm | Over-Balanced Diaphragm | Unbalanced Piston |
| Primary Material | PVD-plated Marine Brass | Marine Brass | Forged Triple Chrome Plated Marine Brass, Stainless Valve Orifice | Marine Brass |
| Low Pressure Ports | 5 | 4 | 4 | 4 |
| High Pressure Ports | 2 | 2 | 2 | 1 |
| Swivel Turret | ✓ | | | |
| Nitrox Compatible | Standard to 40% | Standard to 40% | Standard to 40% | Standard to 100% |
| 300-Bar Din Fitting | Optional | Optional | Optional | Standard |
| Sealed Valve Design | ✓ | ✓ | ✓ | |
| Coldwater / Environmental Seal Protection | ✓ | ✓ | ✓ | |
| Weight | 1.7 lb (78.4 kg) | 1.92 lb (.87 kg) | 21 oz (.59 kg) | .52 lb (1.14 kg) |
| Factory Set Intermediate Pressure | 138 - 142 psi 9.5 - 9.8 bar | 138 – 142 psi 9.5 – 9.8 bar | 138 – 142 psi 9.5 – 9.8 bar | 140 – 145 psi 9.7 – 10 bar |
| Pressure Drop | 20 psi 1.38 bar | 20 psi 1.38 bar | 9 psi .6 bar | 13 psi .89 bar |
| Warranty | LIMITED LIFETIME | LIMITED LIFETIME | LIMITED LIFETIME | LIMITED LIFETIME |
| Limited Lifetime Service Agreement | ✓ | ✓ | ✓ | ✓ |
| CE Approved | ✓ | ✓ | ✓ | ✓ |

200LX+DCX

"Whether it's a technical diver in a cave at 300 ft or a recreational diver on a reef at 40 ft, we only make our regulators one way: to the highest possible standard. Because lives depend on it." — Bob Hollis

Hollis' newest flagship regulator is the 200LX + DCX Regulator, designed by divers for divers. Every feature is designed with high performance and superior manufacturing at every step. The 200LX can be converted from a right-handed hose configuration to a left-handed hose configuration in a manner of minutes. The valve of the 200LX is "PVD" Industrial Plated. PVD is a super-hard coating that is by far the most durable coating available today. Superior quality that will outlast any traditional plating. The front metal ring, packing nut and inhalation knob are also "PVD" Plated.

All LX regulators come standard with MiFlex® hoses and orthodontic mouthpieces with dual color tabs. It comes standard in both YOKE or DIN configuration

The LX regulators come standard with the Hollis Lifetime Warranty, 2-Year Service Interval and Free Parts for Life

Pneumatically balanced PVD plated brass valve results in smooth, easy breathing

Reversible demand valve, can be converted from right-handed hose configuration to left-handed hose configuration

Diver adjustable inhalation knob, allows diver to customize inhalation effort

Adjustable Dive/Pre-Dive switch: Large Venturi lever has a soft rubber grip, which makes it easy to locate and use

Ergonomic exhaust channels bubbles away from field of view and reduces exhaust effort

Improved orthodontic mouthpiece with dual color tabs

PVD plated stainless steel metal ring, adjustable knob and Dive/Pre-Dive end cap

MiFlex® braided hose

Paired with the new DCX 1st stage

LIFETIME WARRANTY

FREE PARTS FOR LIFE

2-Year Service Interval with inspection





PHYSICAL VAPOR DEPOSITION (PVD)

Physical Vapor Deposition (PVD) is a time tested proven technology that has been used for decades in other industries and is now available for specific Hollis products. PVD is a collective set of processes used to deposit thin layers of material, typically in the range of few nanometers to several micrometers. This state of the art process provides a superior alternative to traditional "Chrome Plating", which is environmentally friendly and provides long lasting durablity.

| PART NO. | ITEM |
|---------------|---------------------|
| 240-2010-07-M | 200LX + DCX YOKE |
| 240-2011-07-M | 200LX + DCX DIN |
| 240-2000-LX | 200LX 2ND STAGE BLK |



150LX+DC7

An additional regulator being added to the Hollis Regulator line is the 150LX, similar in design to the 200LX but without the PVD Plating.

The 150LX delivers great performance at a moderate price. This second stage is paired with the DC7 for a great travel-the-world design or for those divers looking for a regulator to provide performance during long deco stops.

The 150LX is paired with the HO2 1st Stage for an oxygen regulator that will never stop performing. Built for oxygen percentage 40% to 100%.

The front metal ring, packing nut and end cap in Stainless Steel.

All LX regulators come standard with MiFlex® hoses and orthodontic mouthpieces with dual color tabs. It comes standard in both YOKE or DIN configuration.

The LX regulators come standard with Hollis's Lifetime Warranty, 2-Year Service Interval and Free Parts for Life

Pneumatically balanced chrome-plated brass valve results in smooth, easy breathing

Reversible demand valve, can be converted from right-handed hose configuration to left handed hose configuration

Adjustable Dive/Pre-Dive switch: Large Venturi lever has a soft rubber grip, which makes it easy to locate and use

Ergonomic exhaust channels bubbles away from field of view and reduces exhaust effort

Improved orthodontic mouthpiece with dual color tabs

Stainless steel cosmetic ring

MiFlex® braided hose

Suitable for coldwater diving

Paired with the DC7 1st stage as Primary regulator

Paired with HO2 1st stage as O2 regulator (O2 Cleaned in sealed bag)

LIFETIME WARRANTY

FREE PARTS FOR LIFE

2-Year Service Interval with inspection



| PART NO. | ITEM |
|---------------|------------------------------------|
| 240-1503-07-M | 150LX + DC7 DIN |
| 240-1504-07-M | 150LX + DC7 YOKE |
| 240-1502-19-M | 150LX + H02 DIN (OXYGEN REGULATOR) |
| 240-3150-M | 150LX OCTOPUS |
| 240-1500-LX | 150LX 2ND STAGE BLK |









100LX+DC3

The 100LX has the performance of the 150LX, but is paired with the DC3 for a great value regulator.

All LX regulators come standard with MiFlex $^{\odot}$ hoses and orthodontic mouthpieces with dual color tabs. It comes standard in both YOKE or DIN configuration.

Pneumatically balanced chromed-plated brass valve results in smooth, easy breathing

Reversible demand valve, can be converted from right-handed hose configuration to left-handed hose configuration

Adjustable Dive/Pre-Dive switch: Large Venturi lever has a soft rubber grip, which makes it easy to locate and use

Chrome Plated Brass Valve

Ergonomic exhaust channels bubbles away from field of view and reduces exhaust effort

Improved orthodontic mouthpiece with dual color tabs

Plastic Cosmetic Ring

MiFlex® braided hose

Paired with the DC3 1st stage as Primary regulator

LIFETIME WARRANTY

FREE PARTS FOR LIFE

2-Year Service Interval with inspection



500SE+DC7 OLD SCHOOL. NEW TECH.

The 500SE utilizes a servo controlled valve to provide precision airflow and unparalleled performance for both air and trimix divers in a side exhaust configuration. To achieve this, we have perfected the original "lever-servo valve" we designed 35 years ago. Overbalanced diaphragm first stage also provides ideal hose routing for both backmount and sidemount users and optimum performance regardless of depth.

Pneumatically balanced servo valve system

Patented Orthodontic Mouthpiece for comfort and reduced jaw fatigue

Standard with 30" MiFlex® hose

Easily disassembled without the use of tools and underwater if necessary

Left or right positioning-no upside-down

Boltsnap tie point

First Stage Configuration: DC7



| ITEM |
|---------------------|
| 100LX + DC3 YOKE |
| 100LX + DC3 DIN |
| 100LX OCTOPUS |
| 100LX 2ND STAGE BLK |
| |

| PART NO. | ITEM |
|---------------|----------------------|
| 240-3500-07-M | 500SE + DC7 YOKE |
| 240-3501-07-M | 500SE + DC7 DIN |
| 240-3625 | 500SE 2ND - W/O HOSE |

DCX

Hollis' newest flagship first stage is the DCX, designed by divers for divers. Every feature is designed with high performance and superior manufacturing at every step.

The DCX is surrounded by the most durable coating available today, PVD. The DCX was been redesigned to reduce weight while improving angle of LP and HP ports to maximize hoses routing. Hollis has made it an industry standard to include the 5th LP port making the DCX the diver's first choice for back-mounted doubles, sidemount or even for the recreational diver that demands the same performance as a technical diver.

Lighter weight

PVD "industrial" plating - PVD (Physical Vapor Deposition) is a super-hard coating that is by far the most durable coating available today. Superior quality that will out last any traditional finish.

Unique over-balanced, diaphragm design - As the diver descends, the over-balancing feature allows the medium pressure gas in the hose to increase at a rate faster than ambient. This results in superior performance at depth.

2 HP ports and 5 LP ports for optimum hose routing

5th port allows for side-mount or twin cylinder set ups

An environmental dry system keeps water out of the main spring chamber thus preventing ice buildup and keeping salt and contamination out

Suitable for cold-water use



PHYSICAL VAPOR DEPOSITION (PVD)

Physical Vapor Deposition (PVD) is a time tested proven technology that has been used for decades in other industries and is now available for specific Hollis products. PVD is a collective set of processes used to deposit thin layers of material, typically in the range of few nanometers to several micrometers. This state of the art process provides a superior alternative to traditional "Chrome Plating", which is environmentally friendly and provides long lasting durablity.

DC3

Built with the same quality as the DCX, without the swivel turret, the DC3 is the ideal 1st stage for double cylinder configuration as well as perfect for single cylinders.

Environmental sealing prevents internal corrosion, contaminants, and icing of the first stage

Withstands rigorous CE standard for coldwater performance





DC7

High performance over-balanced first stage provides progressively greater intermediate pressure as depth and gas density increases for superior gas delivery under the most extreme conditions.

Fixed hose routing ideal for both backmount and sidemount configuration

Environmental sealing prevents internal corrosion, contaminants, and icing of the first stage

Withstands rigorous CE standard for coldwater performance

Nitrox compatible to 40%

2 HP and 4 LP

DIN/300 bar





| PART NO. | ITEM | |
|----------|------------|--|
| 240-3572 | DCX - YOKE | |
| 240-3573 | DCX - DIN | |

| PART NO. | ITEM | |
|----------|------------|--|
| 240-3555 | DC3 - YOKE | |
| 240-3556 | DC3 - DIN | |

| PART NO. | ITEM |
|----------|------------|
| 240-3567 | DC7 - YOKE |
| 240-3568 | DC7 - DIN |










HO2

With the bulletproof design of the Hollis HP5 Non-Balanced Flow-By Piston First Stage, the HO2 First Stage is certified for up to 100% Oxygen Service thanks to highly specialized component materials and manufacturing processes. Cleaned and assembled in a clean room environment with specially designed materials, halocarbon based lubricants and color-coded for easy identification.

The Flow-By Piston Design is the only true Fail-Safe First Stage Design on the market. The Piston will automatically move downstream from the high pressure air coming from the Scuba Cylinder if there is an unexpected malfunction of the High-Pressure Seat. This feature guarantees a constant Gas-Flow to the Second-Stage Regulator. The Regulator First Stage weighs 8.3 oz (235.3 g).

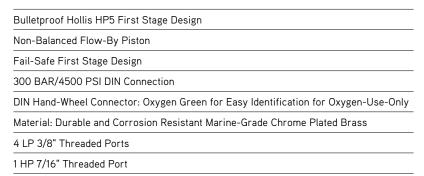





| PART NO. | ITEM |
|----------|------------------------|
| 240.3558 | H-02 PISTON - 02 - DIN |

PART NO.

REGULATOR ACCESSORIES

| | FIRST STAGES |
|-------------|------------------------------|
| 240-3555 | DC3 - YOKE |
| 240-3556 | DC3 - DIN |
| 240-3558 | H-02 PISTON - 02 - DIN |
| 240-3567 | DC7 - YOKE |
| 240-3568 | DC7 - DIN |
| 240-3572 | DCX - YOKE |
| 240-3573 | DCX - DIN |
| | SECOND STAGES |
| 240-3625 | 500SE 2ND - W/O HOSE |
| 240-2000-LX | 200LX 2ND STAGE BLK |
| 240-1500-LX | 150LX 2ND STAGE BLK |
| 240-1000-LX | 100LX 2ND STAGE BLK |
| | REGULATOR ACCESSORIES |
| 240-3001 | OPRV - FIRST STAGE |
| 240-3002 | DIN TO YOKE ADAPTER |
| 240-3004 | ANGLE ADAPTER |
| 240-7031-07 | MOUTHPIECE, BK |
| 240-8616-04 | MOUTHPIECE, RED |
| 240-9211 | DIN CONVERSION KIT - DC REG |
| 240-9212 | PORT CONVERSION KIT - DC1 |
| 240-4152 | REG NECKLACE, ADJUSTABLE, BK |
| 240-4018 | LX COLOR KIT: YELLOW |
| | |

| PART NO. | ITEM |
|----------------|-------------------------------|
| | REGULATOR ACCESSORIES CONT'D |
| 240-4019 | LX COLOR KIT: GREEN |
| 240-4007 | LX COLOR KIT: BLACK |
| 240-4100 | LX PLASTIC RING |
| 240-4200 | LX STAINLESS STEEL RING |
| 240-4300 | LX BLACK ANODIZED RING |
| 204-2382-022 | LP HOSE, 22"/56CM |
| 204-2382-030 | LP HOSE, 30"/76CM |
| 204-2382-036 | LP HOSE, 36"/92CM |
| 204-2383-036 | LP HOSE, 36"/92CM YELLOW |
| 204-2382-040 | LP HOSE, 40"/101CM |
| 204-2382-060 | LP HOSE, 60"/152CM |
| 204-2382-084 | LP HOSE, 84"/213CM |
| 204-2382-022-M | HOSE, MIFLEX, 22"/56CM |
| 204-2382-030-M | HOSE, MIFLEX, 30"/76CM |
| 204-2382-036-M | HOSE, MIFLEX, 36"/92CM |
| 204-2383-036-M | HOSE, MIFLEX, 36"/92CM YELLOW |
| | |
| | REGULATOR SERVICE KITS |
| 220-9203 | SERVICE KIT, 210 2ND |
| 220-9206 | SERVICE KIT, DC7, 1ST STG |

SERVICE KIT, 212/321/221/100LX/150LX/200LX, 2ND STG

SERVICE KIT, DC1/DC2/DC3/DCX, 1ST STG

220-9208

220-9210

220-9213

220-9214

SERVICE KIT, 500SE 2ND

SERVICE KIT, HO2 DIN 1ST

BUOYANCY

BACKMOUNT



ENVIRO-PRO



HD-200



L.T.S.



R.E.D.S.



HTS 2



ELITE 2



SIDEMOUNT



SMS 100 DUAL



SMS 75



SMS KATANA

WINGS



LX SERIES

BUOYANCY COMPARISON CHART

BACKMOUNT

| | Adjustable | Quick Release | Backpad | Single Cylinder | Twin Cylinder | Two Piece Wing | One Piece Wing | Rapid Exhaust Valve | Comfort Padding | Weight Integrated |
|-----------|------------|---------------|----------|-----------------|---------------|----------------|-------------------|------------------------|-----------------|-------------------|
| EnviroPro | 1 | ✓ | 1 | 1 | | | ✓ | ✓ | ✓ | ✓ |
| HD-200 | 1 | ✓ | 1 | ✓ | | ✓ | | ✓ | ✓ | ✓ |
| L.T.S. | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ |
| R.E.D.S. | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| HTS 2 | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | Optional |
| Elite 2 | 1 | ✓ | ✓ | ✓ | ✓ | | | | ✓ | Optional |
| Solo | ✓ | | √ | ✓ | ✓ | | | | | Optional |

SIDEMOUNT

| | Adjustable | Quick Release | Backpad | Single Cylinder | Twin Cylinder | Two Piece Wing | Comfort Padding | Weight Integrated |
|--------------|------------|---------------|---------|-----------------|---------------|----------------|-----------------|-------------------|
| SMS 100 DUAL | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Optional |
| SMS 75 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | Optional |
| SMS KATANA | ✓ | | ✓ | | ✓ | ✓ | | ✓ |

LX SERIES WINGS

| | Adjustable | Quick Release | Backpad | Single Cylinder | Twin Cylinder | Two Piece Wing | One Piece Wing | Rapid Exhaust Valve | Comfort Padding | Weight Integrated |
|----------|------------|---------------|---------|-----------------|---------------|----------------|-------------------|------------------------|-----------------|-------------------|
| S25 | | | | ✓ | | ✓ | | | | |
| S38 | | | | ✓ | | ✓ | | | | |
| C45 | | | | | ✓ | ✓ | | | | |
| C60 | | | | | ✓ | ✓ | | | | |
| C45 DUAL | | | | | ✓ | ✓ | | | | |
| C60 DUAL | | | | | ✓ | ✓ | | | | |

ENVIRO-PRO

The Enviro-Pro is the first BC designed and developed specifically for Public Safety Divers and contaminated water situations. The jacket can be customized to meet your team's mission criteria with a unique a MOLLE strap system that allows you to customize the position of included pockets (weight or utility) to your preference. Tested in jet fuel, gasoline, diesel and MEK without delamination or fabric separation.

The Enviro-Pro is approved for use by NOAA Divers.

Contaminated water resistant—antimicrobial and antibacterial
MOLLE Strap System included
Reinforced black coated D-rings
PU coated webbing
7 oz double coated PU 400 denier nylon
12 lb QLR pockets included
40 lbs Lift
No additional discounts



HD-200

Comfort, function and durability, the HD-200 is everything the advanced sport diver could ask for. Fitted with a combination of Tech/Rec features that provide ultimate comfort and function. Heavyduty construction and innovative design make this BC best in class.

35 lbs bladder S and M sizes, 45 lbs bladder L and XL sizes

1000 denier Cordura™ with PU lamination outer shell and 15 mm urethane internal bladder

Contoured, lightweight backpack with backpad, lumbar support, and a rolled neoprene comfort neck

New 10 lb (4.5 kg) pinch-and-pull weight pockets

5 lb (2.27 kg) non-dumpable rear weight pockets

System weight: 9.4 lbs (4.3 kg)

Traditional 2" waist strap with stainless buckle

2" Nylon waist strap with quick release buckle and 2" SS D-ring

New comfort molded backpad



| PART NO. | ITEM |
|--------------|-------------------|
| | ENVIRO-PRO |
| 208-1160-002 | ENVIRO-PRO BC, SM |
| 208-1160-003 | ENVIRO-PRO BC, MD |
| 208-1160-005 | ENVIRO-PRO BC, LG |
| 208-1160-006 | ENVIRO-PRO BC, XL |
| | HD200 |
| 208-1151-002 | HD-200 BC, SM |
| 208-1151-003 | HD-200 BC, MD |
| 208-1151-005 | HD-200 BC, LG |
| 208-1151-006 | HD-200 BC, XL |
| | |

L.T.S. LIGHT TRAVEL SYSTEM

The Light Travel System (L.T.S.) is our latest warm water solution for traveling divers and destinations where weight restrictions are limited. Incorporating key features from our popular HD200, the L.T.S. is a weight integrated back inflation design with 30 lbs (13.6 kg) of lift, suitable for single AL80s and steel 85s. Its simple, non-modular design stows easy and weighs only 5 lbs.

Ideal for traveling divers, weighs only 5 lbs (2.27 kg)

30 lbs (13.6 kg) of lift capacity

Comfortable backpad

Chest and hip D-rings for accessories or sling bottle

Rugged 1000D nylon outer cover with 420D internal bladder

5 lbs dumpable integrated weight system

Available in four sizes SM, MD, LG, XL

Limited lifetime warranty



R.E.D.S.

RAPID EMERGENCY DEPLOYMENT SYSTEM

R.E.D.S. was developed for RAPID Response SCUBA Diving, when time is critical and delayed "suiting up" is not practical. Design features guarantee user front flotation and it is shaped to allow the rescuer to provide medical attention to a victim while towing fully inflated on the surface. The R.E.D.S. was engineered with routing for all air hoses placed internally to reduce drag and any chance of entanglements. In addition to public safety purposes, this BCD also serves as a great system for kayaking or boating allowing quick and easy deployment.

MOLLE Strap System

One size fits most

Stainless hardcoated D-rings

Rugged 1000 denier Cordura® outer cover, Serviceable 15 mm Polyurethane Internal Bladder

Contoured, lightweight backpack with backpad and storage pouch

2 shoulder stainless steel bent D-rings, 2 lower hip D-rings

Quick adjust waist strap and crotch strap

Left shoulder inflation with elbow

System weight: 5.5 lbs 40 lbs of Lift



| PART NO. | ITEM | | | | | | |
|--------------|--------------------------|--|--|--|--|--|--|
| | LTS | | | | | | |
| 208-1110-002 | LTS BC, SM | | | | | | |
| 208-1110-003 | LTS BC, MD | | | | | | |
| 208-1110-005 | LTS BC, LG | | | | | | |
| 208-1110-006 | LTS BC, XL | | | | | | |
| | R-E-D-S- | | | | | | |
| 208-1180-000 | R-E-D-S- COMPLETE SYSTEM | | | | | | |









HTS 2 HARNESS SYSTEM

The Harness Tech System 2 (HTS 2) easily switches from a single tank soft pack to a dual tank backplate system, the modular capabilities of the HTS 2 may be personalized to your needs.

Streamlined modular harness system

Comfort back pad with lumbar support

Stainless steel D-rings and cam buckle included

Adjustable sternum strap with 2 mounting positions

New version with added carry handle

Accommodates mounting of new S25-LX and S38-LX wings without STA $\,$

Adjustable padded shoulder straps

Optional 10 lb (4.5kg) interchangeable quick-release weight pockets

2 in (5.1 cm) webbing crotch strap with vehicle hook ring

No-slip cam bands with plastic buckles



ELITE 2 HARNESS SYSTEM

Tech/Rec is at its best with the Elite 2 Harness. The Elite 2 Harness System offers you all the features of a technical harness with the added comfort that recreational divers look for.

Adjustable shoulder straps with quick release buckles

Easier donning and doffing of equipment

Adjustable and removable shoulder pads

316 marine grade stainless steel

Adjustable sternum strap included allows for custom fit

System weight (harness only): 1.7 lb (0.77 kg)



Backplate Available Separately

| PART NO. | ITEM |
|--------------|-----------------------------------|
| | HTS 2 |
| 208-1202-002 | HTS 2,W/OPKTS,SM |
| 208-1202-003 | HTS 2,W/OPKTS,MD |
| 208-1202-005 | HTS 2,W/OPKTS,LG |
| 208-1202-006 | HTS 2,W/OPKTS,XL |
| 208-1202-007 | HTS 2,W/OPKTS,XXL |
| | ELITE 2 |
| 208-1222-001 | ELITE 2 HARNESS SYSTEM - XS - SM |
| 208-1222-003 | ELITE 2 HARNESS SYSTEM - MD - LG |
| 208-1222-006 | ELITE 2 HARNESS SYSTEM - XL - XXL |
| | |
| 208-1290-000 | ALUMINUM PLATE, BLACK ONLY |
| 208-1295-000 | STAINLESS STEEL PLATE |









SOLO HARNESS SYSTEM

Designed to meet all the needs of demanding technical divers, the Solo Harness System is clean, simple, and foolproof!

Streamlined design enhances comfort with less drag

Continuous one piece harness system limits failure potential

Stainless steel D-rings and cam buckle included

Removable shoulder pads accept stainless steel D-rings

Backplate sold separately

System weight (harness only): 1 lb (0.45kg)

Solo Harness: One Size, Trim-to-fit



Backplate Available Separately

SMS 100 DUAL EXPEDITION GRADE

Our SMS 100 Sidemount system was designed not just with the sidemounts cave divers in mind, but any diver. Whether you are a beginner, advanced or technical diver, this kit was designed for you. Suitable for sidemounting, double or single cylinders, but also for use with rebreathers or rear mounted singles. SMS100 Dual is redundancy designed for technical sidemount divers using wetsuits, and carrying multiple cylinders. This "go anywhere" system can be used in any environment from open water to the overhead environment. Ready to dive out of the box.

360 Degree wing-52 lbs lift

Bulletproof construction

Dual wing

Redundant inflator system built in

Centrally and uppermost located elbow to avoid overhead interference


Upper / Lower cam band slots for rear mounted single tank

Full visibility over your system

Reduces additional gear

Aids in transporting gear to and from the beach or boat

Streamlines profile and reduces drag, increasing bottom time





| PART NO. | ITEM |
|--------------|------------------------------------|
| | SMS 100 COMPLETE, DUAL |
| 208-1302-003 | SMS100 COMPLETE - SM/MD - DUAL PKG |
| 208-1302-005 | SMS100 COMPLETE - LG/XL - DUAL PKG |
| 208-1302-007 | SMS100 COMPLETE - XXL - DUAL PKG |
| | SMS 100 WING ONLY |
| 208-1312 | SMS100 DUAL WING - ONLY |

SMS 75

Hollis has become a leader in the sidemount market. It is not just a fad and not just a tool for cavers, it's here to stay and is growing. The SMS 75 is an evolution from years of sidemount development. While it will cater more to hardcore cave divers, SMS 75 was created to handle all environments. Proper trim is key, and the wing is designed to promote horizontal diving with increased lift towards the hips where it's needed most. The SMS 75 will also support rear-mounted tanks and reversible inflator positions.

Trapezoid shape to promote horizontal trim

Adjustable and removable wing bungee

Designed for cave or open water sidemount

Cam slots for single tank and grommets at 11" for banded doubles

Reversible Inflator and dump assembly

Rigging kit included: tank bungees, SS Cam bands, SS Bolt snaps and nylon line

Includes sternum strap and crotch strap

Inner located elbow to avoid overhead interference



SMS KATANA CUTTING EDGE

Honed by extensive testing and refinement, the SMS Katana, designed by Nick Hollis in partnership with leading cave diving instructors, is a cutting edge cave penetration tool without equal. The SMS Katana design builds on the proven SMS100 and SMS75 sidemount systems but was further streamlined to reduce drag and allow for easier movement in confined spaces providing optimal performance in the warm water cenotes and caves of northern Florida and Mexico.

Bulletproof construction

35 lbs. of lift. The perfect wing size and weight for travel.

One size fits all "H" harness

3 weight pockets: two 5 lb. (2.26 kg) and one 3 lb. (1.36 kg)

8 strategically placed D-rings: 2 on each shoulder strap, 1 on each hip/shoulder strap connection point and 2 rear, one left and one right, for securing main tanks or other accessories.

Reversible inflator and dump assembly

Primary bungees integrated into the wing to pull tanks up and away from diver's torso

Retainers located to avoid overhead interference

Rigging Kit not included

OPTIONAL ACCESSORIES

Butt-plate with heavy-duty rails

Storage pouch with SS bolt-snaps

Mains Rigging Kit







| PART NO. | ITEM |
|--------------|-------------------------------------|
| 208-1375-003 | SMS75 COMPLETE - SM/MD - SINGLE PKG |
| 208-1375-005 | SMS75 COMPLETE - LG/XL - SINGLE PKG |
| 208-1375-006 | SMS75 COMPLETE - XXL - SINGLE PKG |
| 208-1311 | SMS75 SINGLE WING - ONLY |

| (·)OLLIS katana | 100 | | E S |
|----------------------|-----|----|-----|
| | | () | |
| To the second second | 5 | | |
| | | | |

| PART NO. | ITEM |
|----------|------------------------------|
| 208-1380 | SMS KATANA |
| 208-1265 | BUTT-PLATE UNIVERSAL |
| 208-1266 | STORAGE POCKET WITH SS SNAPS |
| 240-1550 | SMS MAINS RIGGING KIT |









LX SERIES WINGS

BACKMOUNT SERIES

Hollis proudly presents the LX Series Wings, developed and tested by technical divers, and 3 years in the making. Quality and performance are the two most integral features of this product, which is why Hollis reintroduced the proven S Series and C Series Wings with key improvements.

Every wing in the LX Series includes a 360-degree internal retraction system that matches the design of the wing, allowing for a streamlined rig at all times. The exterior bladder is constructed of 1680D Cordura, the internal bladder of 420 nylon, which means these wings are tough. We're so confident in the LX Series, every new LX wing includes a lifetime warranty.

1680D Cordura Exterior Bladder

420-Nylon Internal Bladder

360° Degree Internal Retraction System for a streamlined rig at all times

New Oval Corrugated Hose Power Inflator Mechanism

Redesigned overpressure relief valve (OPV)

Corrosion-resistant stainless steeldrain grommets

Welded Flange and One-Piece Retainer: Servicing w/o need-for-tools

Centrally-Located Inflator Mechanism Elbow: Avoids tank valve/regulator interference

Single Wing: Lower Left Pull Dump/Overpressure Relief Valve

Dual Wing: Lower Left and Lower Right Pull Dump/ Overpressure Relief Valves

Hollis Power Inflator System: Durable impact resistant plastic with a corrugated rubber hose

Internal Components and Inlet Quick-Disconnect Nipple: Corrosion-resistant chrome plated brass

Cam Band Slots for cylinder mounting

LIMITED LIFETIME WARRANTY





C60 LX DOUBLE WING

| PART NO. | ITEM |
|--------------|---------------------|
| 208-1253-025 | S25 LX WING W/SLOTS |
| 208-1253-038 | S38 LX WING W/SLOTS |
| 208-1253-045 | C45 LX WING |
| 208-1254-045 | C45 LX DUAL WING |
| 208-1253-060 | C60 LX WING |
| 208-1254-060 | C60 LX DUAL WING |









BUOYANCY ACCESSORIES

| PART NO. | ITEM |
|--------------|--|
| 208-1320 | SMS BUNGEE KIT |
| 240-1550 | SMS MAINS RIGGING KIT |
| 240-1650 | SMS DECO RIGGING KIT |
| 240-1700 | DELUXE STAGE KIT-SMALL FOR AL40 |
| 240-1800 | DELUXE STAGE KIT-LARGE FOR AL80 |
| 208-0015 | 10LB WEIGHT SYSTEM, LX - ELITE, SOLO, RIDE, HTS2 |
| 208-0025-000 | 10LB WEIGHT POUCH - REPLACEMENT FOR LX |
| | (ELITE, SOLO, HTS2, EXPLORER, HD200) (SINGLE) |
| 208-0026-000 | WT- POCKET- HD200- SINGLE- REPLACE |
| 208-0030-000 | 5LB NON-DITCHABLE OPTIONAL POCKETS (PAIR) |
| 208-0042 | SMS WEIGHT SYSTEM PLATE |
| 208-1060-013 | INFLATOR SYSTEM W/ ELBOW 13" /33CM |
| 208-1060-016 | INFLATOR SYSTEM W/ ELBOW 16" /41CM |
| 208-1060-019 | INFLATOR SYSTEM W/ ELBOW 19" /48CM |
| 208-1061-016 | INFLATOR SYSTEM W/ RE VALVE 16" /41CM |
| 208-1062 | ELBOW FITTING |
| 208-1063 | INFLATOR ONLY, STD K STYLE |
| 208-1065-013 | CORRUGATED HOSES 13" /33CM |
| 208-1065-016 | CORRUGATED HOSES 16" /41CM |
| 208-1065-019 | CORRUGATED HOSES 19" /48CM |
| 204-2381-009 | LP INFLATOR HOSE 9"/23CM (FOR SMS50) |
| 204-2381-015 | LP INFLATOR HOSE 15"/38CM (FOR SMS50 SPORT) |
| 204-2381-022 | LP INFLATOR HOSE, 22"/56CM |
| 204-2381-030 | LP INFLATOR HOSE, 30"/76CM |
| 204-2381-032 | LP INFLATOR HOSE, 32"/81CM |
| 208-1034 | HTS DOUBLE MOUNTING PLATES (SET OF TWO) |
| 208-1070-002 | SINGLE TANK ADAPTER BOLT KIT |
| 208-1070-010 | CAM BAND (STAINLESS) |
| 208-1070-020 | CAM BAND (DELRIN) |
| 208-1071-001 | SINGLE TANK ADAPTER W/BOLTS AND NUTS, V2 |
| 208-1322 | RUBBER TANK WRAP KIT (PAIR) |
| 208-1025 | CROTCH STRAP, 1-0-INCH WEBBING W/ SCOOTER RING |
| 208-1026 | OP VALVE PULL DUMP |
| 208-1026-1 | OP VALVE PULL DUMP - SMS |

| PART NO. | ITEM |
|---------------|--|
| 208-1027 | CROTCH STRAP, 1-5-INCH WEBBING W/ SCOOTER RING |
| 208-1028 | STAINLESS QUICK RELEASE BUCKLE |
| 208-1029 | UTILITY POCKET |
| 208-1030 | MASK POCKET |
| 208-1032 | CROTCH STRAP, 2-0-INCH WEBBING W/ SCOOTER RING |
| 208-1038 | SMS50/75 RAIL KIT (1 SET) |
| 208-1039 | SMS100 RAIL KIT (1 SET) |
| 208-1264 | BACK PLATE BACKPAD W/BOOKSCREWS |
| 208-3350 | RE CAP |
| 208-336-337 | RE SEAT |
| 208-568-210 | O-RING |
| 19720-001-003 | VALVE HOUSING |
| 208-340-13 | VALVE WITH 13" CABLE |
| 208-340-16 | VALVE WITH 16" CABLE |
| 208-340-19 | VALVE WITH 19" CABLE |
| 208-3430 | SPRING |
| 208-1065-013 | CORRUGATED HOSES 13" /33CM |
| 208-1065-016 | CORRUGATED HOSES 16" /41CM |
| 208-1065-019 | CORRUGATED HOSES 19" /48CM |
| 208-22739 | RUBBER RING |
| 208-1210-002 | ATS PADDED CUMMERBUND SM |
| 208-1210-003 | ATS PADDED CUMMERBUND MD |
| 208-1210-005 | ATS PADDED CUMMERBUND LG |
| 208-1210-006 | ATS PADDED CUMMERBUND XL |
| 208-1210-008 | ATS PADDED CUMMERBUND XXXL |
| 208-1255-025 | REPL- BLADDER, S25 |
| 208-1255-038 | REPL- BLADDER, S38 |
| 208-1255-045 | REPL- BLADDER, C45 |
| 208-1255-060 | REPL- BLADDER, C60 |
| 208-1265 | BUTT-PLATE UNIVERSAL |

EXPOSURE

DRYSUITS





SEMI-DRY



NEOTEK 8/7/6

AUG (ADVANCED UNDERGARMENTS)









AUG 260 SOCKS

ACCESSORIES





CANVAS OVERBOOT



BEANIE





EXPOSURE COMPARISON CHARTS

| | Entry | Material | Socks | Unisex | Collar | Pockets | Hood Attached |
|--------------|-------|-------------------------|-----------------|----------|----------|----------|---------------|
| DRYSUIT | | | | | | | |
| DX-300X | Front | Trilaminate Cordura® | 5mm Neoprene | ✓ | | ✓ | |
| BTR-500 | Front | Trilaminate Ripstop | 5mm Neoprene | √ | Optional | √ | |
| SEMI-DRY | | | | | | | |
| Neotek 8/7/6 | Front | 8/7/6 Neoprene | | ✓ | | 1 | √ |

AUG (ADVANCED UNDERGARMENTS)

| | Availability | Material | Fabric Weight | Unisex | Machine Washable |
|---------------|--------------------------|---------------------------|---------------|--------|------------------|
| AUG BASE | Top and Bottom Available | Polyester fleece/ Spandex | | | ✓ |
| AUG 260 | Top and Bottom Available | Polyester fleece/ Spandex | 260 gm | ✓ | ~ |
| AUG 450 | Top and Bottom Available | Polyester fleece/ Spandex | 450 gm | | * |
| AUG 260 SOCKS | Socks | Polyester fleece/ Spandex | 260 gm | ✓ | * |

DX-300X DRYSUIT

The DX-300X is the newest addition to the Hollis exposure line. Developed over three years in a variety of demanding conditions, it is maneuverable and comfortable while ensuring long wearing durability.

The DX-300X is the benchmark expedition-grade drysuit, made from TriLaminate Cordura® for superior strength and comfort. Overall material weight is 700 g/sq.

"Outer Layer" is a heavy-duty Cordura® which offers superior puncture and abrasion resistance with incredible tear strength in excess of 300N

The middle "Butyl Mass" is constructed of 12 layers to provide long-term water integrity with superb chemical and ozone resistance

"Inner Liner" is a silk weave polyester offering the optimum comfort and softness with easy donning and doffing

Our patented BIAS cut combined with a telescopic torso increases freedom of movement, but allows for a closer fit reducing air migration

The wide, flat seam construction minimizes the risk of leaks in high risk areas

Fitted with YKK zipper

Fitted with SiTech Neck Tite system with silicon seal

Fitted with SiTech Quick Change Solution Oval wrist system with silicon seals as standard

Two large Velcro® bellows pockets with an internal D-ring

Double thickness kneepads

5 mm neoprene socks

Adjustable suspenders included


5-year warranty on workmanship













| PART NO. | ITEM |
|--------------|---------------------------------|
| 277-3000-001 | DX-300X W/NEOPRENE SOCKS - XS |
| 277-3000-002 | DX-300X W/NEOPRENE SOCKS - S |
| 277-3000-003 | DX-300X W/NEOPRENE SOCKS - M |
| 277-3000-004 | DX-300X W/NEOPRENE SOCKS - ML |
| 277-3000-005 | DX-300X W/NEOPRENE SOCKS - L |
| 277-3000-006 | DX-300X W/NEOPRENE SOCKS - XL |
| 277-3000-007 | DX-300X W/NEOPRENE SOCKS - XXL |
| 277-3000-009 | DX-300X W/NEOPRENE SOCKS - XXXL |











BTR-500

DRYSUIT

The new BTR-500 drysuit uses our latest Butyl Trilaminate Ripstop material to produce a lightweight but very durable suit. Everything from the material to the taping has been fine-tuned and optimized to make the BTR-500 an absolute pleasure to dive in, whether you are at 10m or 100m.

The BTR-500 uses our specially developed 600g/sqm Butyl Trilaminate Ripstop material which incorporates a 140g/sqm High Decitex Nylon 6.6 Ripstop external lining for optimum tear, puncture and abrasion resistance that has the benefit of a easy clean and wash down finish. The internal lining is made from a patented coating that maximizes water integrity and seam tape adhesion as well as making the suit easy to get in and out of. The internal coating also make suit repairs exceptionally easy.

As with all our suits, each panel that makes up the BTR-500 is cut on the bias of the material to increase the stretch and flexibility of the material by up to 15%. This, combined with clever panel designs, makes this front entry suit especially easy to get on without the need to struggle to get the neck seal over the head. A composite zip maintains flexibility in the torso and is protected by a Velcro secured flap.

Si-Tech inflator and auto shoulder dump

Composite front entry zip

Latex neck and wrist seals

Internal suspenders

Two front mounted zippered leg pockets

5mm thick neoprene socks

5-year warranty on workmanship











| PART NO. | ITEM |
|--------------|--------------------------------|
| 277-5000-001 | BTR500 W/NEOPRENE SOCKS - XS |
| 277-5000-002 | BTR500 W/NEOPRENE SOCKS - S |
| 277-5000-003 | BTR500 W/NEOPRENE SOCKS - M |
| 277-5000-004 | BTR500 W/NEOPRENE SOCKS - ML |
| 277-5000-005 | BTR500 W/NEOPRENE SOCKS - L |
| 277-5000-006 | BTR500 W/NEOPRENE SOCKS - XL |
| 277-5000-007 | BTR500 W/NEOPRENE SOCKS - XXL |
| 277-5000-009 | BTR500 W/NEOPRENE SOCKS - XXXL |







NEOTEK 8/7/6

SEMI-DRY

Enjoy the warmth of our Neotek 8/7/6 coldwater hooded semi-dry. Constructed from a compression resistant 8/7/6 mm neoprene and a Hollis exclusive ThermaSkin inner liner. Includes a front neckdam with revolutionary G-lock horizontal front zipper for easy on/off and a tight barrier against water intrusion. Arms and legs are also sealed against leaks with an internal dam. All seams are double glued and butt joined with a blind stitch construction which is all covered by a unique liquid seam. Fitted with generous pockets on both the left and right thigh and comes in 9 different sizes.

8/7/6 mm compression-resistant and superstretch neoprene mix

Exclusive "ThermaSkin" inner liner

G-lock horizontal front zipper with internal bib

Neck, wrist and ankle internal dams

Seams are quadruple glued and butt joined with a blindstitch

Liquid glued seams cover entire suit

Tech-friendly thigh pockets on both left and right thigh

Attached hood standard

Seams sewn and double taped for extreme protection







| PART NO. | ITEM |
|-----------------|---------------------------------------|
| 277-2710-002 | NEOTEK SEMI-DRYSUIT, UNISEX, SM |
| 277-2710-003 | NEOTEK SEMI-DRYSUIT, UNISEX, MD |
| 277-2710-004 | NEOTEK SEMI-DRYSUIT, UNISEX, ML |
| 277-2710-005 | NEOTEK SEMI-DRYSUIT, UNISEX, LG |
| 277-2710-005-SH | NEOTEK SEMI-DRYSUIT, UNISEX, L/SHORT |
| 277-2710-006 | NEOTEK SEMI-DRYSUIT, UNISEX, XL |
| 277-2710-006-SH | NEOTEK SEMI-DRYSUIT, UNISEX, XL/SHORT |
| 277-2710-007 | NEOTEK SEMI-DRYSUIT, UNISEX, XXL |
| 277-2710-008 | NEOTEK SEMI-DRYSUIT, UNISEX, XXXL |











AUG 450 ADVANCED UNDERGARMENT

The AUG 450 maintains the AUG families super high wicking properties, drawing body moisture to the outside of the garment, away from the skin, keeping you dry and warm. Fully machine washable, and the wicking properties won't be degraded by the washing cycle. The AUG 450 comes in a range of dedicated Men's and Women's sizes, and is sold as a separate top and bottom, allowing mix and match of sizes if required.

For use under all types of drysuits

Dual layered technical fleece

High insulation without thickness

Zippered arm pocket

Thumb loops for easy on/off

Men's/Women's sizing

Machine washable



| PART NO. | ITEM |
|--------------|-------------------------------|
| | AUG 450 TOP MENS |
| 277-0056-002 | AUG 450 (TOP) - MENS SM |
| 277-0056-003 | AUG 450 (TOP) - MENS MD |
| 277-0056-005 | AUG 450 (TOP) - MENS LG |
| 277-0056-006 | AUG 450 (TOP) - MENS XL |
| 277-0056-007 | AUG 450 (TOP) - MENS XXL |
| 277-0056-008 | AUG 450 (TOP) - MENS XXXL |
| | AUG 450 TOP LADIES |
| 277-0056-011 | AUG 450 (TOP) - LADIES 4/3XS |
| 277-0056-012 | AUG 450 (TOP) - LADIES 6/2XS |
| 277-0056-013 | AUG 450 (TOP) - LADIES 8/XS |
| 277-0056-014 | AUG 450 (TOP) - LADIES 10/SM |
| 277-0056-015 | AUG 450 (TOP) - LADIES 12/MD |
| 277-0056-016 | AUG 450 (TOP) - LADIES 14/ML |
| 277-0056-017 | AUG 450 (TOP) - LADIES 16/LG |
| 277-0056-018 | AUG 450 (TOP) - LADIES 18/2XL |

| D. D. T. V.O. | 1 |
|---------------|----------------------------------|
| PART NO. | ITEM |
| | AUG 450 BOTTOM MENS |
| 277-0057-002 | AUG 450 (BOTTOM) - MENS SM |
| 277-0057-003 | AUG 450 (BOTTOM) - MENS MD |
| 277-0057-005 | AUG 450 (BOTTOM) - MENS LG |
| 277-0057-006 | AUG 450 (BOTTOM) - MENS XL |
| 277-0057-007 | AUG 450 (BOTTOM) - MENS XXL |
| 277-0057-008 | AUG 450 (BOTTOM) - MENS XXXL |
| | AUG 450 BOTTOM LADIES |
| 277-0057-011 | AUG 450 (BOTTOM) - LADIES 4/3XS |
| 277-0057-012 | AUG 450 (BOTTOM) - LADIES 6/2XS |
| 277-0057-013 | AUG 450 (BOTTOM) - LADIES 8/XS |
| 277-0057-014 | AUG 450 (BOTTOM) - LADIES 10/SM |
| 277-0057-015 | AUG 450 (BOTTOM) - LADIES 12/MD |
| 277-0057-016 | AUG 450 (BOTTOM) - LADIES 14/ML |
| 277-0057-017 | AUG 450 (BOTTOM) - LADIES 16/LG |
| 277-0057-018 | AUG 450 (BOTTOM) - LADIES 18/2XL |





31

AUG 260 ADVANCED UNDERGARMENT

Made from a 260 gm combination of soft touch plush brushed polyester fleece and spandex for the utmost comfort, AUG 260 traps air within the plush fiber. It maintains a protective warm air layer between the diver and the outside environment. AUG 260 has super stretch which allows 4-way flexibility while still retaining its original warmth and strength. AUG 260 comes in a range of unisex sizes, and is sold as a separate top and bottom, allowing mix and match of sizes if required.

Unisex

Available in top or bottom

Technical fleece material

Layering garment

Machine washable







AUG 260 SOCKS

AUG 260 socks are constructed with a single layer, 260 gm stretch fabric, keeping your feet warm and dry. Their excellent wicking properties and low bulk allow them to be layered with other thermal socks for colder dives. Machine washable.

| PART NO. | ITEM | |
|--------------|--------------------------------|--|
| | AUG 260 TOP UNISEX | |
| 277-0054-002 | AUG 260 TOP - SM (UNISEX) | |
| 277-0054-003 | AUG 260 TOP - MD (UNISEX) | |
| 277-0054-005 | AUG 260 TOP - LG (UNISEX) | |
| 277-0054-006 | AUG 260 TOP - XL (UNISEX) | |
| 277-0054-007 | AUG 260 TOP - XXL (UNISEX) | |
| 277-0054-008 | AUG 260 TOP - XXXL (UNISEX) | |
| | AUG 260 BOTTOM UNISEX | |
| 277-0055-002 | AUG 260 BOTTOM - SM (UNISEX) | |
| 277-0055-003 | AUG 260 BOTTOM - MD (UNISEX) | |
| 277-0055-005 | AUG 260 BOTTOM - LG (UNISEX) | |
| 277-0055-006 | AUG 260 BOTTOM - XL (UNISEX) | |
| 277-0055-007 | AUG 260 BOTTOM - XXL (UNISEX) | |
| 277-0055-008 | AUG 260 BOTTOM - XXXL (UNISEX) | |

SIZING

| Shoe Sizes |
|------------|
| 5 - 9 |
| 10 - 13 |
| 14 - 15 |
| |



| PART NO. | ITEM | |
|--------------|--------------------------------|--|
| | AUG 260 SOCKS UNISEX | |
| 277-0052-002 | AUG 260 SOCKS - SM/MD (UNISEX) | |
| 277-0052-005 | AUG 260 SOCKS - LG/XL (UNISEX) | |
| 277-0052-007 | AUG 260 SOCKS - XXL (UNISEX) | |









AUG BASE ADVANCED UNDERGARMENT

AUG Base is an ultra-fast wicking fabric, designed as a base layer that draws moisture away from the body, effectively keeping the skin drier, and allowing any additional undergarments the optimal chance to maintain body warmth during and after the dive. Fully machine washable, and the wicking properties won't be degraded by the washing cycle.

Made from a combination of polyester fleece and spandex for the utmost comfort, AUG Base comes in a range of dedicated Men's and Women's sizes, and is sold as a separate top and bottom, allowing mix and match of sizes if required.

| Fast wicking PolyPro | |
|--------------------------|--|
| Keeps diver dry and warm | |
| Men's/Women's sizing | |
| Layering garment | |
| Machine washable | |



The ideal pre- and post-dive thermal protection for any diver trying to preserve core warmth. The ideal pre- and post dive thermal protection for any diver trying to preserve core warmth. The Beanie is constructed with a single layer, 260gm stretch fabric, keeping your head warm and dry. One size fits most.





| ITEM |
|------------------------------|
| AUG BASE TOP MENS |
| AUG BASE TOP - MENS SM |
| AUG BASE TOP - MENS MD |
| AUG BASE TOP - MENS LG |
| AUG BASE TOP - MENS XL |
| AUG BASE TOP - MENS XXL |
| AUG BASE TOP - MENS XXXL |
| AUG BASE TOP LADIES |
| AUG BASE TOP - LADIES 4/3XS |
| AUG BASE TOP - LADIES 6/2XS |
| AUG BASE TOP - LADIES 8/XS |
| AUG BASE TOP - LADIES 10/SM |
| AUG BASE TOP - LADIES 12/MD |
| AUG BASE TOP - LADIES 14/ML |
| AUG BASE TOP - LADIES 16/LG |
| AUG BASE TOP - LADIES 18/2XL |
| |

| PART NO. | ITEM |
|--------------|---------------------------------|
| | AUG BASE BOTTOM MENS |
| 277-0051-002 | AUG BASE BOTTOM - MENS SM |
| 277-0051-003 | AUG BASE BOTTOM - MENS MD |
| 277-0051-005 | AUG BASE BOTTOM - MENS LG |
| 277-0051-006 | AUG BASE BOTTOM - MENS XL |
| 277-0051-007 | AUG BASE BOTTOM - MENS XXL |
| 277-0051-008 | AUG BASE BOTTOM - MENS XXXL |
| | AUG BASE BOTTOM LADIES |
| 277-0051-011 | AUG BASE BOTTOM - LADIES 4/3XS |
| 277-0051-012 | AUG BASE BOTTOM - LADIES 6/2XS |
| 277-0051-013 | AUG BASE BOTTOM - LADIES 8/XS |
| 277-0051-014 | AUG BASE BOTTOM - LADIES 10/SM |
| 277-0051-015 | AUG BASE BOTTOM - LADIES 12/MD |
| 277-0051-016 | AUG BASE BOTTOM - LADIES 14/ML |
| 277-0051-017 | AUG BASE BOTTOM - LADIES 16/LG |
| 277-0051-018 | AUG BASE BOTTOM - LADIES 18/2XL |
| | |
| 277-0053-003 | BEANIE REGULAR |









CANVAS OVERBOOT

Protect your feet and prevent air from pocketing in the socks of your drysuit with the Hollis Canvas OverBoot. Rugged and comfortable.

| Tough super grip rubberized sole |
|--|
| Lace top for a comfortable semi-custom fit |
| Rubberized toe and heel |
| Fin strap catch on heel |

Drain holes on sides for quick drying

Padded sides and tongue for extra comfort





| PART NO. | ITEM |
|--------------|--------------------------|
| 215-1860-055 | CANVAS OVER-BOOT SIZE 5 |
| 215-1860-056 | CANVAS OVER-BOOT SIZE 6 |
| 215-1860-057 | CANVAS OVER-BOOT SIZE 7 |
| 215-1860-058 | CANVAS OVER-BOOT SIZE 8 |
| 215-1860-059 | CANVAS OVER-BOOT SIZE 9 |
| 215-1860-060 | CANVAS OVER-BOOT SIZE 10 |
| 215-1860-061 | CANVAS OVER-BOOT SIZE 11 |
| 215-1860-062 | CANVAS OVER-BOOT SIZE 12 |
| 215-1860-063 | CANVAS OVER-BOOT SIZE 13 |
| 215-1860-064 | CANVAS OVER-BOOT SIZE 14 |
| 215-1860-065 | CANVAS OVER-BOOT SIZE 15 |

EXPOSURE ACCESSORIES

| PART NO. | ITEM |
|--------------|-------------------------------|
| 277-0025 | P-VALVE, BALANCED |
| 277-0026 | ADHESIVE, DRYSUIT, PINT |
| 26037 | PU RING QCS WRIST (1) |
| 25990 | STIFFRING QCS OVAL WRIST (1) |
| 25991 | WRIST SEAL SILFLEX BTLNCK (1) |
| 26038 | NECKTITE TOOL (1) |
| 25988 | NECKTITE LOCK RING (1) |
| 25989 | NECK SEAL BELLOW SILFLEX (1) |
| 26039 | NECK PU RING (1) |
| 277-0024 | NYLON THIGH POCKET |
| 215-1600-002 | DRYSUIT GAITER SM |
| 215-1600-003 | DRYSUIT GAITER MD |
| 215-1600-005 | DRYSUIT GAITER LG |
| 215-1600-006 | DRYSUIT GAITER XL |

MASKS AND FINS



М1



МЗ



Μ4



F1



F1 YELLOW TIP



F1 LT



F2

MASKS COMPARISON CHART

| | Frameless | Rigid Frame | Ultra Clear Glass | Standard Glass | Optical Lenses |
|----|-----------|-------------|-------------------|----------------|----------------|
| M1 | ✓ | | ✓ | | |
| М3 | | ✓ | ✓ | | ✓ |
| M4 | ✓ | | | ✓ | |

FIN COMPARISON CHART

| | Material | Angled Strap Mounts | Spring Heel Straps | Vented Blade | Generous Foot Pocket | Weight |
|----------------------------|---------------|---------------------|--------------------|--------------|----------------------|-----------|
| F1 "BAT FIN" | Rubber | ✓ | ✓ | ✓ | ✓ | 3.5 lbs |
| F1 "BAT FIN" YELLOW TIP | Rubber | ✓ | ✓ | ✓ | ✓ | 3.5 lbs |
| F1 LT | SEBS Compound | ✓ | ✓ | ✓ | ✓ | 2.8 lbs |
| F2 | Monprene | 1 | ✓ | 1 | ✓ | 2.125 lbs |

М1

The M1 Mask raises the bar for optical quality and distortion-free vision. The lens is made from Saint-Gobain, a highly transparent extra clear glass which is valued for its unique appearance and optical qualities. The low iron oxide content gives it optimum clarity. Its light transmittance is greater than that of conventional glass. The use of extra clear glass results in a virtually colorless product which allows objects to remain vivid and natural. This makes the lens distortion free and helps improve visibility, even in low light conditions underwater.

Frameless 100% pure silicone skirt

Saint-Gobain Diamant—crystal clear lens

Wide vision and low volume



M3

The M3 Mask provides visibility, the most important aspect of any dive, with distortion-free vision and superior fit. This low profile design uses a rigid frame and two lenses with an ultra clear glass. The low iron content produces a higher light transmittance and a reduced green tint inherent in other glasses. This makes the lenses distortion free and helps improve color and visibility in low light conditions underwater. Optical lenses from -1.5 to -8.0 diopters available.

Frameless 100% pure silicon skirt

Saint-Gobain Diamant—crystal clear lenses

Easily fitted with optical lenses from -1.5 to -8.0 diopters.

Wide vision and low volume

4 way buckle design for superior comfort and storage if needed





GoPro mount included with M3 Mask



M3 OPTICAL LENSES

The M3 may be easily fitted with Corrective Optical Lenses from -1.5 to -8.0 Diopters in 0.5 increments. Lenses are manufactured from optical quality UltraClear tempered glass. For ordering info, see pg 39.

M3 GOPRO® MOUNT

Mount your GOPRO® camera and housing on your M3 Mask for handsfree photography and video. Made from durable Delrin plastic, the M3 GoPro Mount is easy-to-install on the M3 with just a Hex Key Wrench. Once mounted, your camera and housing can be attached to your mask when needed and you can film your underwater adventures with ease.

| PART NO. | ITEM | |
|-------------|------------------------|--|
| | M1 MASK | |
| 205-4500-07 | MASK M-1 | |
| | M3 MASK | |
| 205-4700-07 | MASK M-3 (BLACK) | |
| 205-4700-10 | MASK M-3 (WHITE/BLACK) | |
| 205-1001 | M3 GOPRO MOUNT | |









М4

When choosing a mask, fit and field of vision come first. The M4 Mask gives you the best of both worlds, fitting a wide variety of faces and offering superior peripheral and vertical vision. It is low profile, stows easy and carries an excellent value.

Frameless silicon skirt

Rugged mask box and adjustable mask strap included

Increased vision and low volume



The Hollis F1 fin blends graceful movement, power, and bulletproof construction making it the standard in technical diving.

High grade, heavy-duty rubber construction

Angled strap mounts for comfort and a better transition of power

Spring heel straps with easy-grip heel tab

Multiple strap mounting positions for a fine tuned fit

Vented blade to reduce stress while accelerating

Generous foot pocket



The new F1 LT is a shorter and slightly lighter version of the original F1 molded from SEBS. The LT is also more durable due to its UV resistant properties.

Short blade for easier finning in confined spaces


Angled strap mounts for comfort and a better transition of power

Spring heel straps with easy-grip heel tab

Multiple strap mounting positions for a fine tuned fit

Vented blade reduces stress while accelerating water over blade

Generous foot pocket





| PART NO. | ITEM |
|--------------|-------------------------|
| | F1 LT |
| 214-2201-004 | F-1 LT SM |
| 214-2201-005 | F-1 LT REG |
| 214-2201-006 | F-1 LT XL |
| 214-2201-007 | F-1 LT XXL |
| | F1 "BAT FIN" YELLOW TIP |
| 214-2210-005 | F-1 REG YELLOW TIP |
| 214-2210-006 | F-1 XL YELLOW TIP |
| 214-2210-007 | F-1 XXL YELLOW TIP |
| | |











F2

Increase your power-to-weight ratio. The patented F2 is designed to add blade surface on both the downstroke and upstroke to increase your efficiency with any type of kick.

High grade, heavy-duty monoprene construction

Angled strap mounts for comfort and a better transition of power

Spring heel straps with easy-grip heel tab

Multiple strap mounting positions for a fine tuned fit

Vented blade to reduce stress while accelerating

Generous foot pocket with 3 sizes—Small, Regular and XL



| PART NO. | ITEM | |
|--------------|-----------|--|
| 214.2300.002 | F-2 SMALL | |
| 214.2300.005 | F-2 REG | |
| 214.2300.006 | F-2 XL | |

MASK AND FIN ACCESSORIES

| PART NO. | ITEM |
|---------------|---------------------------|
| 205-4500-STRA | AP SILICONE MASK STRAP |
| 205-1000 | NEOPRENE MASK STRAP |
| 205-1001 | M3 GOPRO MOUNT |
| | OPTICAL LENSES |
| 205-5015-LT | OPTICAL LENS M3 -1-5 - LT |
| 205-5015-RT | OPTICAL LENS M3 -1-5 - RT |
| 205-5020-LT | OPTICAL LENS M3 -2-0 - LT |
| 205-5020-RT | OPTICAL LENS M3 -2-0 - RT |
| 205-5025-LT | OPTICAL LENS M3 -2-5 - LT |
| 205-5025-RT | OPTICAL LENS M3 -2-5 - RT |
| 205-5030-LT | OPTICAL LENS M3 -3-0 - LT |
| 205-5030-RT | OPTICAL LENS M3 -3-0 - RT |
| 205-5035-LT | OPTICAL LENS M3 -3-5 - LT |
| 205-5035-RT | OPTICAL LENS M3 -3-5 - RT |
| 205-5040-LT | OPTICAL LENS M3 -4-0 - LT |
| 205-5040-RT | OPTICAL LENS M3 -4-0 - RT |
| 205-5045-LT | OPTICAL LENS M3 -4-5 - LT |
| 205-5045-RT | OPTICAL LENS M3 -4-5 - RT |
| 205-5050-LT | OPTICAL LENS M3 -5-0 - LT |
| 205-5050-RT | OPTICAL LENS M3 -5-0 - RT |

| PART NU. | HEM |
|-------------|--|
| | OPTICAL LENSES CONT'D |
| 205-5055-LT | OPTICAL LENS M3 -5-5 - LT |
| 205-5055-RT | OPTICAL LENS M3 -5-5 - RT |
| 205-5060-LT | OPTICAL LENS M3 -6-0 - LT |
| 205-5060-RT | OPTICAL LENS M3 -6-0 - RT |
| 205-5065-LT | OPTICAL LENS M3 -6-5 - LT |
| 205-5065-RT | OPTICAL LENS M3 -6-5 - RT |
| 205-5070-LT | OPTICAL LENS M3 -7-0 - LT |
| 205-5070-RT | OPTICAL LENS M3 -7-0 - RT |
| 205-5075-LT | OPTICAL LENS M3 -7-5 - LT |
| 205-5075-RT | OPTICAL LENS M3 -7-5 - RT |
| 205-5080-LT | OPTICAL LENS M3 -8-0 - LT |
| 205-5080-RT | OPTICAL LENS M3 -8-0 - RT |
| | |
| 205-5099 | OPTICAL LENS, M3 SET, 28 PC ALL NEGATIVE |
| | SPRING STRAP KIT |
| 214-8002 | SPRING STRAP KIT SMALL, F-1/F-2 |
| 214-8006 | SPRING STRAP KIT REG/XL, F-1/F-2 |
| 214-8007 | SPRING STRAP KIT XXL, F-1 /F-2 |
| | |

FIN SIZING

| | SMALL | REGULAR | XL | XXL |
|-------|-------|---------|-------|-------|
| F1 | 4-6 | 7-9 | 10-12 | 13-15 |
| F1 LT | 4-6 | 7-9 | 10-12 | 13-15 |
| F2 | 4-6 | 7-9 | 10-12 | 13-15 |



BAGS



DUFFEL BAG



MESH DUFFEL BAG



DRY BAG



REGULATOR BAG

DUFFEL BAG

Made from a durable tarpaulin material, the Hollis Duffel is an excellent gear bag.

The bag is tough and rugged, extremely resistant to abrasions and punctures. It contains one main compartment featuring a tough D-zipper and one internal zippered pocket. Carrying the bag is an easy task with backpack shoulder straps. It also incorporates carry handles on both ends of the bag and two straps with padded handles. The bag is large enough to contain all of your dive gear and even features an ID pocket on top just by chance that someone has the same cool Hollis duffel bag as you.

| D-zip main compartment with internal zippered pocket | | | |
|--|---------------------------|--|--|
| ID pocket on top Backpack shoulder straps | | | |
| Carry handles on both ends | Straps with padded handle | | |
| Rugged construction | Capacity: 95 Liters | | |
| Dimensions: 28" x 16" x 14" | | | |



MESH DUFFEL BAG

Made from laminated nylon mesh, the Hollis Mesh Duffel is a great way to air out your wet equipment while keeping everything secure.

| D-zip main compartment | |
|---------------------------------|--|
| Shoulder carry strap included | |
| Carry straps with padded handle | |
| Rugged construction | |



DRY BAG

This dry bag is ideal for all types of outdoor adventures, from camping to white water rafting, boat trips to biking. The classic stuff-sack design built to stay dry.

| PVC-tarpaulin | |
|---------------------|--|
| 9"W x 21.25"H | |
| Roll closure system | |

High-frequency welded and heat seal taped technique make the bag watertight

Waterproof materials



REGULATOR BAG

#10 YKK self-healing zippers

Interior Velcro® loops

1620 Denier Ballistic Nylon construction

Dimensions: W 12 in. (30.5 cm), H 4.35 in. (11 cm), L 12 in. (30.5 cm)



| PART NO. | ITEM | |
|-------------|------------------|--|
| 217-6506-01 | BAG, DUFFLE | |
| 217-6506-02 | BAG, DUFFLE MESH | |

| PART NO. | ITEM | |
|-------------|---|--|
| 217-6506-03 | BAG, DRY, PVC-TARPAULIN - 9"WX21-25"H - BLACK | |
| 217-6506-04 | BAG, REGULATOR | |







LIGHTS







LED 3



LED MINI 3



MICRO LIGHT

LIGHTS COMPARISON CHART

| | LED 6 | LED 3 | LED Mini3 | Micro Light |
|----------------|---------------------------------|---------------------------------|---------------------------------|---|
| Туре | Handheld | Handheld | Handheld | Handheld |
| Use | Primary | Back-Up | Back-Up | Back-Up |
| Material | Aluminum 6061-T6 | Aluminum 6061-T6 | Aluminum 6061-T6 | Aluminum 6061-T6 |
| Surface Finish | CNC machined and black anodize |
| Power | 6W | 3W | 3W | 1W |
| Light Source | Cree LED T6 | Cree LED R5 | Cree LED R5 | Cree LED R5 with lifespan of 50,000 hours |
| Lifespan | 50,000 hours | 50,000 hours | 50,000 hours | 50,000 hours |
| CCT Range | 5000k-7000k | 5000k-7000k | 5000k-7000k | 5000k-7000k |
| Brightness | 320 Lumens | 290 Lumens | 250 Lumens | 55 Lumens |
| Output | 1000mA | 900mA | 700mA | 700mA |
| Beam Angle | 8 degrees | 8 degrees | 8 degrees | 8 degrees |
| Battery Type | 3 x C alkaline battery | 3 x AA alkaline battery | 3 x AAA alkaline battery | 1 x AAA alkaline battery (included) |
| Light Source | 230 lumens | 230 lumens | 210 lumens | 55 lumens |
| Burntime | 6 hours | 3 hours | 3 hours | 1.2 hours |
| Depth Rating | 600 ft (200 m) | 650 ft (200 m) | 600 ft (200 m) | 300 ft (100 m) |
| Switch Type | Mechanical | Mechanical | Mechanical | Mechanical |
| Size | 46 mm (D) x 220 mm (L) | 50 mm (D) x 147 mm (L) | 40 mm (D) x 127.70 mm (L) | 40 mm (D) x 127.70 mm (L) |
| Weight | .34 kg (including batteries) | .38 kg (including batteries) | .18 kg (including batteries) | .18 kg (including batteries) |





LED 6

| Туре | Single 6W primary light |
|----------------------------------|---|
| Material | Anodized Aluminum 6061-T6 |
| Surface finish: | CNC machined and black anodize |
| Light source | Cree LED T6 with lifespan of 50,000 hours |
| CCT range | 5000k-7000k |
| Brightness | 320 Lumens |
| Output | 1000mA |
| Beam angle | Concentrated 8 degrees |
| Battery type | 3 x C alkaline battery |
| Burntime | 6 hours |
| Depth rated | 650 ft (200 m) |
| Switch type | Mechanical |
| Size | 1.81 in (46 mm) (D) x 8.66 in (220 mm) (L) |
| Weight | 343 g |
| Rear tie-point for boltsnap / la | anyard included |
| Double O-ring seals | |
| Custom aluminum reflector | |
| | |



LED 3

| Туре | Single 3W backup light |
|----------------|---|
| Material | Anodized Aluminum 6061-T6 |
| Surface finish | CNC machined and black anodize |
| Light source | Cree LED R5 with lifespan of 50,000 hours |
| CCT range | 5000k-7000k |
| Brightness | 290 Lumens |
| Output | 900mA |
| Beam angle | Concentrated 8 degrees |
| Battery type | 3 x AA alkaline battery |
| Burntime | 3 hours |
| Depth rated | 650 ft (200 m) |
| Switch type | Mechanical |
| Size | 1.97 in (50 mm) (D) x 5.79 in (147 mm) (L) |
| Weight | 380 g |
| · | · · · · · · · · · · · · · · · · · · · |



| PART NO. | ITEM | |
|------------|---------------------------------|--|
| 206-3080-M | LED6 PRIMARY TORCH, PUSH BUTTON | |
| 206-3060-M | LED3 BACKUP TORCH, PUSH BUTTON | |









LED MINI 3

| Туре | Single 3W backup light |
|----------------|--|
| Material | Anodized Aluminum 6061-T6 |
| Surface finish | CNC machined and black anodize |
| Light source | Cree LED R5 with lifespan of 50,000 hours |
| CCT range | 5000k-7000k |
| Brightness | 250 Lumens |
| Output | 700mA |
| Beam angle | Concentrated 8 degrees |
| Battery type | 3 x AAA alkaline battery |
| Burntime | 3 hours |
| Depth rated | 650' (200 m) |
| Switch type | Mechanical |
| Size | 1.61 in (41 mm) (D) x 5.39 in (137 mm) (L) |
| Weight | 220 g |
| | |



MICRO LIGHT

The Hollis LED Micro Light offers the reliability, durability and efficiency of LED technology in a small compact package.

| Туре | Single 1W LED |
|----------------|--|
| Material | Anodized Aluminum 6061-T6 |
| Surface finish | CNC machined and black anodize |
| Light source | Cree LED R5 with lifespan of 50,000 hours |
| CCT range | 5000k-7000k |
| Brightness | 55 Lumens |
| Output | 700mA |
| Beam angle | Concentrated 8 degrees |
| Battery type | 1 x AAA alkaline battery |
| Burntime | 1.2 hours |
| Depth rated | 300' |
| Switch type | Twist |
| Size | 3.19 in (81 mm) (D) x 6.89 in (175 mm) (L) |
| Weight | 34 g |
| - | |



| PART NO. | ITEM |
|------------|-------------------------------|
| 206.3050.M | LED MINI 3 TORCH, PUSH BUTTON |
| 206.3065 | MICRO LIGHT |

LIGHT ACCESSORIES

| ITEM | |
|---|---|
| GOODMAN HANDLE ASSY- | |
| LIGHT, MINI3, BATTERY HOLDER | |
| LIGHT, REAR CAP ASSEMBLY, MINI3 | |
| LIGHT, REAR CAP ASSEMBLY, MINI3 MAGNETIC | |
| LIGHT, 3W BACKUP, BATTERY HOLDER | |
| LIGHT HEAD ASSEMBLY, 3W BACKUP (INCLUDES HOUSING) | |
| | GOODMAN HANDLE ASSY- LIGHT, MINI3, BATTERY HOLDER LIGHT, REAR CAP ASSEMBLY, MINI3 LIGHT, REAR CAP ASSEMBLY, MINI3 MAGNETIC LIGHT, 3W BACKUP, BATTERY HOLDER |

| PART NO. | ITEM |
|------------|---|
| 206-3460 | LIGHT, REAR CAP ASSEMBLY, 3W BACKUP |
| 206-3460-M | LIGHT, REAR CAP ASSEMBLY, 3W BACKUP MAGNETIC |
| 206-3180 | LIGHT, LED6, HOUSING-ALU |
| 206-3380 | LIGHT HEAD ASSEMBLY, LED6 PRIMARY |
| 206-3480 | LIGHT, REAR CAP ASSEMBLY, LED6 PRIMARY |
| 206-3480-M | LIGHT, REAR CAP ASSEMBLY, LED6 PRIMARY MAGNETIC |









FINGER SPOOLS

Finger Spools are most often used as a Gap Reel or for Short Distance Exploration. Small and low-profile, a spool fits nicely out of the way in a pocket or clipped off to a D-ring. The holes in the side allow for clipping in a double-ended snap anywhere along the perimeter of the spool to keep the line tight when not in use. Hollis Stainless Steel Finger Spools, made from either 304L Stainless Steel or ABS plastic, are as rugged as they come. Or, choose the Hollis Finger Spool made of glass-filled nylon for durability in marine environments.

Available in 30 ft (9 m), 100 ft (30 m) and 150 ft (45 m)

The 30' is often used for GAP reels. The 100' and 150' Finger Spools are often used for shooting lift bags or as safety reel

Smaller spools for safety and jump reels

Spool fits in drysuit pocket, utility pocket or clipped off to a D-ring

Available in ABS plastic or 304L stainless steel

#24 white braid cave line

Stainless double ended clip included



| PART NO. | ITEM |
|-------------|----------------------|
| 203-8030-SS | SS FINGER SPOOL 30' |
| 203-8100-SS | SS FINGER SPOOL 100' |
| 203-8150-SS | SS FINGER SPOOL 150' |
| 203-8100 | FINGER SPOOL 100' |
| 203-8150 | FINGER SPOOL 150' |



LIFT BAGS 60 AND 125 LB LIFT

You never know what you might find on a dive, so be prepared and always pack a Lift Bag. The Hollis 60 lb (27.2 kg) or 125 lb (56.7 kg) Lift Bag is just what you need to raise or mark items.

125-lb Lift Capacity

Tear and mildew-resistant durable nylon fabric

High-visibility bright orange for easy identification

Over pressure relief valve with pull dump

Stainless D-ring for line attachment

Handle at the top of the lift bag for easy handling

Lift bags are covered by a 12 month limited warranty





SIGNAL MARKER **BUOYS**

The Hollis Signal Marker Buoy (SMB) is an essential safety device all divers should carry on every dive. The SMB is the smart-way for a diver to mark their location when making safety stops, completing mandatory decompression stops, and signaling the boat if they surface a distance away from the boat.

Signal Marker Buoy is a Closed Cell Design made from Durable 300-D Polyester material with Radio Frequency (RF) Welded Seams. The Hollis SMB also has a Sturdy Nylon Webbing Strap Loop with a Stainless Steel D-Ring for attachment to a reel or anchor line along with a wrist lanyard for hand-held use.

Buoy is covered by a 12 month limited warranty











| PART NO. | ITEM | |
|-------------|---|--|
| 208-2060-03 | 60LB LIFT BAG ORANGE | |
| 208-2125-03 | 125LB LIFT BAG ORANGE | |
| 208-2021-03 | SIGNAL MARKER BUOY, CLOSED CELL, COMPACT ORANGE | |
| 208-2022-03 | SIGNAL MARKER BUOY, W/ SLING POUCH, ORANGE | |
| 208-2023-18 | SIGNAL MARKER BUOY, W/ SLING POUCH, YELLOW | |

GENERAL ACCESSORIES

| PART NO. | ITEM |
|--------------|----------------------------------|
| 210.8037 | 1" PLASTIC SLIDER |
| 210.8038 | 2" PLASTIC SLIDER |
| 210.8010 | 3 BAR SLIDER SST 2" |
| 210.8009 | 3 BAR SLIDE SERRATED 2" |
| 210.8023 | 2" D-RING STAINLESS |
| 210.8022 | 1" D-RING STAINLESS |
| 210.8020 | 2" ROUND RING STAINLESS |
| 210.8024 | 2" D-RING BENT STAINLESS |
| 210.8025 | 2" D-RING STAINLESS, LOW PROFILE |
| 210.8004.030 | SWIVEL EYE BUTTERFLY SNAP 3" |
| 210.8008.035 | QUICKLINK 2.0" |
| 210.8002.030 | 3" SWIVEL BOLT SNAP SST |
| 210.8002.035 | 3.5" SWIVEL BOLT SNAP SST |
| 210.8002.045 | 4.5" SWIVEL BOLT SNAP SST |
| 210.8003.035 | 3.5" DOUBLE ENDED SNAP SST |
| 210.8003.045 | 4.5" DOUBLE ENDED SNAP SST |

| PART NO. | ITEM |
|------------|---|
| 210.8040 | NARROW PLATE / WELDED D-RING 90 DEGREE WAIST |
| 210.8041 | WIDE PLATE / WELDED D-RING 45 DEGREE CHEST |
| 210.8042 | 1" D-RING TO HOSE CLAMP |
| 210.8031 | BOOK SCREWS |
| 220.8120 | TRAUMA SHEARS W/SHEATH |
| 220.8133 | LINE CUTTER, TITANIUM |
| 220.8124 | SMALL LINE ARROW 1.5X2.5" (4PK) |
| 220.8122 | UNDERWATER NOTEBOOK |
| 220.8122.1 | UNDERWATER NOTEBOOK NOTES - REFILL |
| 220.8122.2 | UNDERWATER NOTEBOOK - COVER ONLY |
| 220.8123 | 3 PCS WRIST SLATE |
| 220.8131 | TRIBOLUBE 71, 02 COMPATIBLE LUBE - 20Z / 57 G SYRINGE |
| 220.9110 | INFLATOR MULTI-TOOL |



MERCHANDISING

| PART NO. | ITEM |
|--------------|------------------------------|
| 280-4400-002 | HOODED SWEATSHIRT / SMALL |
| 280-4400-003 | HOODED SWEATSHIRT / MEDIUM |
| 280-4400-005 | HOODED SWEATSHIRT / LARGE |
| 280-4400-006 | HOODED SWEATSHIRT / X-LARGE |
| 280-4400-007 | HOODED SWEATSHIRT / XX-LARGE |
| 260-1008 | DIVE MAT |
| 220-8135 | KEYCHAIN |









EXPOSURE SIZING CHARTS

DX-300X AND BTR-500 UNISEX SIZING

| | WEI | GHT | HEI | GHT | СНІ | EST | WA | IST | Н | IP | INSE | EAM |
|------|-----------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|-----------|---------|---------|
| SIZE | LBS | KG | IN | СМ | IN | СМ | IN | СМ | IN | СМ | IN | СМ |
| XS | 120 - 145 | 54 - 66 | 63 - 66 | 160 - 168 | 32 - 36 | 81 - 91 | 26 - 30 | 66 - 76 | 32 - 36 | 81 - 91 | 26 - 28 | 66 - 71 |
| SM | 135 - 155 | 61 - 70 | 66 - 68 | 168 - 173 | 34 - 38 | 86 - 96 | 28 - 32 | 71 – 81 | 34 - 38 | 86 - 96 | 27 - 29 | 68 - 73 |
| MD | 150 - 175 | 68 - 80 | 67 - 70 | 170 - 178 | 37 - 40 | 94 - 101 | 30 - 34 | 76 - 86 | 35 - 39 | 89 - 99 | 28 - 30 | 71 - 76 |
| ML | 170 - 195 | 77 – 89 | 69 - 72 | 175 - 183 | 38 - 42 | 96 - 106 | 32 - 36 | 81 – 91 | 37 - 41 | 94 - 104 | 29 - 31 | 73 - 79 |
| LG | 185 – 210 | 84 - 96 | 70 - 73 | 178 – 185 | 40 - 44 | 101 - 112 | 34 - 38 | 86 - 96 | 39 - 43 | 99 - 109 | 30 - 32 | 76 - 81 |
| XL | 210 - 240 | 96 - 109 | 71 – 74 | 180 – 188 | 42 - 46 | 106 – 117 | 36 - 40 | 91 – 101 | 41 – 45 | 104 - 114 | 31 – 33 | 79 - 84 |
| XXL | 235 - 265 | 107 - 121 | 73 - 76 | 185 - 193 | 44 - 48 | 112 - 122 | 38 - 42 | 96 - 106 | 43 - 47 | 109 - 119 | 32 - 34 | 81 - 86 |
| XXXL | 260 - 295 | 117 - 134 | 74 – 78 | 188 – 198 | 46 - 50 | 117 - 127 | 40 - 44 | 101 - 112 | 45 - 49 | 114 - 124 | 33 - 35 | 84 - 89 |

NEOTEK 8/7/6 UNISEX SIZING

| | WEI | GHT | HEI | GHT | СН | EST | WA | IST | Н | IP |
|-------|-----------|-----------|--------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| SIZE | LBS | KG | IN | СМ | IN | СМ | IN | СМ | IN | СМ |
| SM | 135 – 150 | 61 - 68 | 5'6" - 5'8" | 167 - 172 | 36 - 38 | 91 - 96 | 29 - 31 | 73 - 78 | 35 - 36 | 88 - 91 |
| MD | 155 – 170 | 70 – 77 | 5'8" - 5'10" | 172 - 177 | 38 - 40 | 96 - 101 | 31 - 33 | 78 - 83 | 37 - 39 | 93 - 99 |
| ML | 165 – 180 | 74 - 81 | 5'9" - 5'11" | 175 – 180 | 40 - 41 | 101 – 104 | 32 - 34 | 81 - 86 | 38 - 40 | 96 - 101 |
| LG/SH | 170 – 185 | 74 - 81 | 5'7" - 5'9" | 170 - 175 | 41 - 42 | 104 - 106 | 33 - 35 | 83 - 88 | 39 - 41 | 99 - 104 |
| LG | 175 – 190 | 79 - 86 | 5'10" - 6'1" | 177 - 182 | 41 - 42 | 104 - 106 | 33 - 35 | 83 - 88 | 39 – 41 | 99 - 104 |
| XL/SH | 185 – 200 | 81 – 88 | 5'8" - 5'10" | 172 - 177 | 42 - 44 | 106 – 111 | 35 - 37 | 88 - 93 | 41 - 43 | 104 - 109 |
| XL | 190 - 205 | 86 - 92 | 5'11" - 6'3" | 180 – 190 | 42 - 44 | 106 – 111 | 35 - 37 | 88 - 93 | 41 - 43 | 104 - 109 |
| XXL | 205 - 220 | 92 - 99 | 6'0" - 6'3" | 182 – 190 | 44 - 46 | 111 – 116 | 37 - 39 | 93 – 99 | 44 - 46 | 111 – 116 |
| XXXL | 230 - 260 | 104 – 117 | 6'1" - 6'4" | 185 – 193 | 47 - 50 | 119 – 127 | 40 - 43 | 101 – 109 | 47 - 50 | 119 – 127 |

EXPOSURE SIZING CHARTS

AUG BASE SIZING

WOMEN'S

| SIZE | HEI | GHT | CHE | EST | WA | IST | HIPS | | INSEAM | |
|------|--------------|-----------|------------|----------|------------|--------|------------|---------|------------|-------|
| | IN | СМ | IN | СМ | IN | СМ | IN | СМ | IN | СМ |
| 4 | 5'3"-5'6" | 160-168 | 27-30" | 68-76 | 20-23" | 51-59 | 30-33" | 76-84 | 28-29.5" | 71-75 |
| 6 | 5'4"-5'7" | 162.5-170 | 29 -32.5" | 74-82 | 22.5-25.5" | 57-65 | 32.5-35.5" | 82-90 | 28.5-30.5" | 73-77 |
| 8 | 5'5"-5'8" | 165-173 | 31.5-34.5" | 80-88 | 25-28" | 63-71 | 34.5-38" | 88-96 | 29.5-31" | 75-79 |
| 10 | 5'6"-5'9" | 167.5-175 | 34-37" | 86-94 | 27-30.5" | 69-77 | 37-40" | 94-102 | 30.5-32" | 77-81 |
| 12 | 5' '7"-5'10" | 170-178 | 36-39.5" | 92-100 | 29.5-32.5" | 75-83 | 39.5-42.5" | 100-108 | 31-32.5" | 79-83 |
| 14 | 5'8"-5'11" | 172.5-180 | 38.5-41.5" | 98-106 | 32-35" | 81-89 | 41.5-45" | 106-114 | 32-33.5" | 81-85 |
| 16 | 5'8"-5'11" | 172.5-180 | 41-44" | 104 -112 | 34.5-37.5" | 87-95 | 44-47" | 112-120 | 32-33.5" | 81-85 |
| 18 | 5'8"-5'11" | 172.5-180 | 43.5-46.5" | 110-118 | 36.5-40" | 93-101 | 46.5-49.5" | 118-126 | 32-33.5" | 81-85 |

MEN'S

| SIZE | HEI | GHT | GHT CHEST | | WAI | ST | INSEAM | |
|------|------------|-----------|------------|---------|------------|---------|----------|-------|
| | IN | СМ | IN | СМ | IN | СМ | IN | СМ |
| XS | 5'5"-5'8" | 165-172.5 | 30-34" | 76-86 | 23-27" | 58-68 | 30-31.5" | 76-80 |
| SM | 5'7"-5'10" | 170-178 | 34-38" | 86-96 | 27-30.5" | 68-78 | 31-32.5" | 79-83 |
| MD | 5'9"-6'0" | 175.5-183 | 38-41.5" | 96-106 | 30.5-34.5" | 78-88 | 32.5-34" | 82-86 |
| LG | 5'11"-6'2" | 180.5-188 | 41.5-45.5" | 106-116 | 34.5-38.5" | 88-98 | 33.5-35" | 85-89 |
| XL | 6'1"-6'4" | 185.5-193 | 45.5-49.5" | 116-126 | 38.5-42.5" | 98-108 | 34.5-36" | 88-92 |
| XXL | 6'3"-6'6" | 190.5-198 | 49.5-53.5" | 126-136 | 42.5-46.5" | 108-118 | 36-37.5" | 91-95 |
| XXXL | 6'5"-6'8" | 195.5-203 | 53.5-57.5" | 136-146 | 46.5-50.5" | 118-128 | 37-38.5" | 94-98 |

AUG 260 UNISEX SIZING

| SIZE | HE | IGHT | T CHEST | | WAIS | ST | INSEAM | | |
|------|------------|-----------|------------|---------|------------|---------|----------|-------|--|
| | IN | СМ | IN | СМ | IN | СМ | IN | СМ | |
| SM | 5'5"-5'8" | 165-172.5 | 30-34" | 76-86 | 23-27" | 58-68 | 30-31.5" | 76-80 | |
| MD | 5'7"-5'10" | 170-178 | 34-38" | 86-96 | 27-30.5" | 68-78 | 31-32.5" | 79-83 | |
| LG | 5'9"-6'0" | 175.5-183 | 38-41.5" | 96-106 | 30.5-34.5" | 78-88 | 32.5-34" | 82-86 | |
| XL | 5'11"-6'2" | 180.5-188 | 41.5-45.5" | 106-116 | 34.5-38.5" | 88-98 | 33.5-35" | 85-89 | |
| XXL | 6'1"-6'4" | 185.5-193 | 45.5-49.5" | 116-126 | 38.5-42.5" | 98-108 | 34.5-36" | 88-92 | |
| XXXL | 6'3"-6'6" | 190.5-198 | 49.5-53.5" | 126-136 | 42.5-46.5" | 108-118 | 36-37.5" | 91-95 | |

EXPOSURE SIZING CHARTS

AUG 450 SIZING

WOMEN'S

| SIZE | HEI | GHT | СНЕ | ST | WA | IST | HIPS | | INSEAM | |
|------|--------------|-----------|------------|----------|------------|--------|------------|---------|------------|-------|
| | IN | СМ | IN | СМ | IN | СМ | IN | СМ | IN | СМ |
| 4 | 5'3"-5'6" | 160-168 | 27-30" | 68-76 | 20-23" | 51-59 | 30-33" | 76-84 | 28-29.5" | 71-75 |
| 6 | 5'4"-5'7" | 162.5-170 | 29 -32.5" | 74-82 | 22.5-25.5" | 57-65 | 32.5-35.5" | 82-90 | 28.5-30.5" | 73-77 |
| 8 | 5'5"-5'8" | 165-173 | 31.5-34.5" | 80-88 | 25-28" | 63-71 | 34.5-38" | 88-96 | 29.5-31" | 75-79 |
| 10 | 5'6"-5'9" | 167.5-175 | 34-37" | 86-94 | 27-30.5" | 69-77 | 37-40" | 94-102 | 30.5-32" | 77-81 |
| 12 | 5' '7"-5'10" | 170-178 | 36-39.5" | 92-100 | 29.5-32.5" | 75-83 | 39.5-42.5" | 100-108 | 31-32.5" | 79-83 |
| 14 | 5'8"-5'11" | 172.5-180 | 38.5-41.5" | 98-106 | 32-35" | 81-89 | 41.5-45" | 106-114 | 32-33.5" | 81-85 |
| 16 | 5'8"-5'11" | 172.5-180 | 41-44" | 104 -112 | 34.5-37.5" | 87-95 | 44-47" | 112-120 | 32-33.5" | 81-85 |
| 18 | 5'8"-5'11" | 172.5-180 | 43.5-46.5" | 110-118 | 36.5-40" | 93-101 | 46.5-49.5" | 118-126 | 32-33.5" | 81-85 |

MEN'S

| SIZE | HEI | GHT | СНЕ | EST | WAI | ST | INS | EAM |
|------|------------|-----------|------------|---------|------------|---------|----------|-------|
| | IN | СМ | IN | СМ | IN | СМ | IN | СМ |
| XS | 5'5"-5'8" | 165-172.5 | 30-34" | 76-86 | 23-27" | 58-68 | 30-31.5" | 76-80 |
| SM | 5'7"-5'10" | 170-178 | 34-38" | 86-96 | 27-30.5" | 68-78 | 31-32.5" | 79-83 |
| MD | 5'9"-6'0" | 175.5-183 | 38-41.5" | 96-106 | 30.5-34.5" | 78-88 | 32.5-34" | 82-86 |
| LG | 5'11"-6'2" | 180.5-188 | 41.5-45.5" | 106-116 | 34.5-38.5" | 88-98 | 33.5-35" | 85-89 |
| XL | 6'1"-6'4" | 185.5-193 | 45.5-49.5" | 116-126 | 38.5-42.5" | 98-108 | 34.5-36" | 88-92 |
| XXL | 6'3"-6'6" | 190.5-198 | 49.5-53.5" | 126-136 | 42.5-46.5" | 108-118 | 36-37.5" | 91-95 |
| XXXL | 6'5"-6'8" | 195.5-203 | 53.5-57.5" | 136-146 | 46.5-50.5" | 118-128 | 37-38.5" | 94-98 |

SOCK SIZING

| | Shoe Sizes |
|---------|------------|
| SM / MD | 5 - 9 |
| LG / XL | 10 - 13 |
| XXL | 14 - 15 |